VINEYARD

Transportation Master Plan

October 2025

VINEYARD
STAY CONNECTED

HALES ENGINEERING
innovative transportation solutions

ACKNOWLEDGEMENTS

Vineyard City

Naseem Ghandour, Public Works/Engineering Director

Morgan Brim, Community Development Director

Eric Ellis, City Manager

Vineyard Mayor & City Council

Julie Fullmer, *Mayor*

Brett Clawson, *City Council*

Jacob Holdaway, *City Council*

Mardi Sifuentes, *City Council*

Sara Cameron, *City Council*

Vineyard Planning Commission

Steve Anderson, Commissioner

Bryce Brady, Commissioner

Christopher Bramwell, Commissioner

Brad Fagg, Commissioner

Graden Ostler, Commissioner

Nathan Steele, Commissioner

Consultant Team

Josh Gibbons, PE, PTOE, RSP1

Jordi Berrett, PE, PTOE

Ryan Hales, PE, PTOE, AICP

Jeremy Titensor

Mike Brown, PE, PTOE

TABLE OF CONTENTS

Acknowledgements i

TABLE OF CONTENTS ii

LIST OF TABLES iii

LIST OF FIGURES iv

Introduction 1

- Overview 2
- Demographics 4
- Land Use 5
- Travel Demand Forecasting 8
- Public Engagement 8

Roadway Network 12

- Purpose 13
- Functional Classification 13
- Level of Service Analysis 14
- Existing Conditions 22
- Future (2033) Conditions 29
- Future (2050) Conditions 32

Public Transit & Active Transportation 41

- Purpose 42
- Public Transit 42
- Active Transportation 42

Safety 46

- Purpose 47
- Safety Hotspots 47

Conclusion 49

- Overview 50
- Next Steps 50

LIST OF TABLES

Table 1: Vineyard TAZ summary 5
Table 2: Topics and Comments from the Public Input Meeting 10
Table 3: Roadway Classifications 14
Table 4: Level of Service Descriptions 18
Table 5: Roadway Capacities 21
Table 6: Intersection LOS Criteria 22
Table 7: Recommended Phase 1 Improvement Projects 23
Table 8: Existing Evening Peak Hour Intersection Level of Service 28
Table 9: Future (2033) No-Build Evening Peak Hour Level of Service 29
Table 10: Recommended Phase 2 Improvement Projects 31
Table 11: Future (2033) Build Evening Peak Hour Build LOS 32
Table 12: Future (2050) No-Build Evening Peak Hour Level of Service 34
Table 13: Recommended Phase 3 Improvement Projects 37
Table 14: Future (2050) Build Evening Peak Hour Level of Service 37

LIST OF FIGURES

Figure 1: Vicinity map 3
Figure 2: Vineyard mode split 5
Figure 3: Vineyard Household Growth 6
Figure 4: Vineyard Employment Growth 7
Figure 5: Community Survey Locations 11
Figure 6: Arterial cross-sections 15
Figure 7: Collector cross-sections 16
Figure 8: Local street cross-section 17
Figure 9: Visual representation of LOS 19
Figure 10: Data Collection Locations 20
Figure 11: Existing (2023) Roadway Network and Intersection Control 24
Figure 12: Existing (2023) Roadway Jurisdiction 25
Figure 13: Existing (2023) Roadway Volumes and LOS 27
Figure 14: Future (2033) No-Build Roadway Volumes and LOS 30
Figure 15: Future (2033) Projects 33
Figure 16: Future (2033) Build Roadway Volumes and LOS 35
Figure 17: Future (2050) No-Build Roadway Volumes and LOS 36
Figure 18: Future (2050) Projects 38
Figure 19: Future (2050) Roadway Network and Intersection Control 39
Figure 20: Future (2050) Build Roadway Volumes and LOS 40
Figure 21: Public transit route map 44
Figure 22: Active Transportation 45
Figure 23: Crash Analysis Heat Map 48

INTRODUCTION

OVERVIEW

With history back to the 1890s, Vineyard City has most recently experienced rapid growth. The population has increased from 139 residents in 2010, to approximately 14,500 residents in 2023. This growth rate is unmatched in Utah. With this growth comes many challenges and opportunities to provide safe and efficient transportation for the citizens of Vineyard.

The City continues to see rapid growth with the development of Utah City, the Forge, and many other projects in the area. With a high number of residents traveling in and out of the City to commute to work during peak hours, there are existing challenges with transportation in the City. The purpose of this Transportation Master Plan (TMP) is to plan for the multi-modal transportation needs of Vineyard City, accounting for the projected future growth.

Vineyard is in Utah County, Utah, about 9 miles northwest of downtown Provo – bordered by Lindon to the north, Orem to the east, and Utah Lake to the west, as shown in Figure 1.

While numerous traffic studies have been done in or around the Vineyard City, this will be the first edition of the transportation master plan. The Vineyard City TMP is being written with the most current land use plans. Because of large and often unpredictable growth in the City, it will be necessary to update this TMP periodically.

Key to planning for Vineyard's transportation needs is an understanding of the City's goals and policies related to transportation. The other portions of the General Plan include future land use and development plans and goals in the City and how those will be achieved. This TMP provides details regarding the City's transportation needs, including future demand and improvements, to meet the goals outlined by the City. The TMP expands the vision for the General Plan into actionable mobility-related goals and objectives to guide Vineyard's near- and long-term transportation investments.

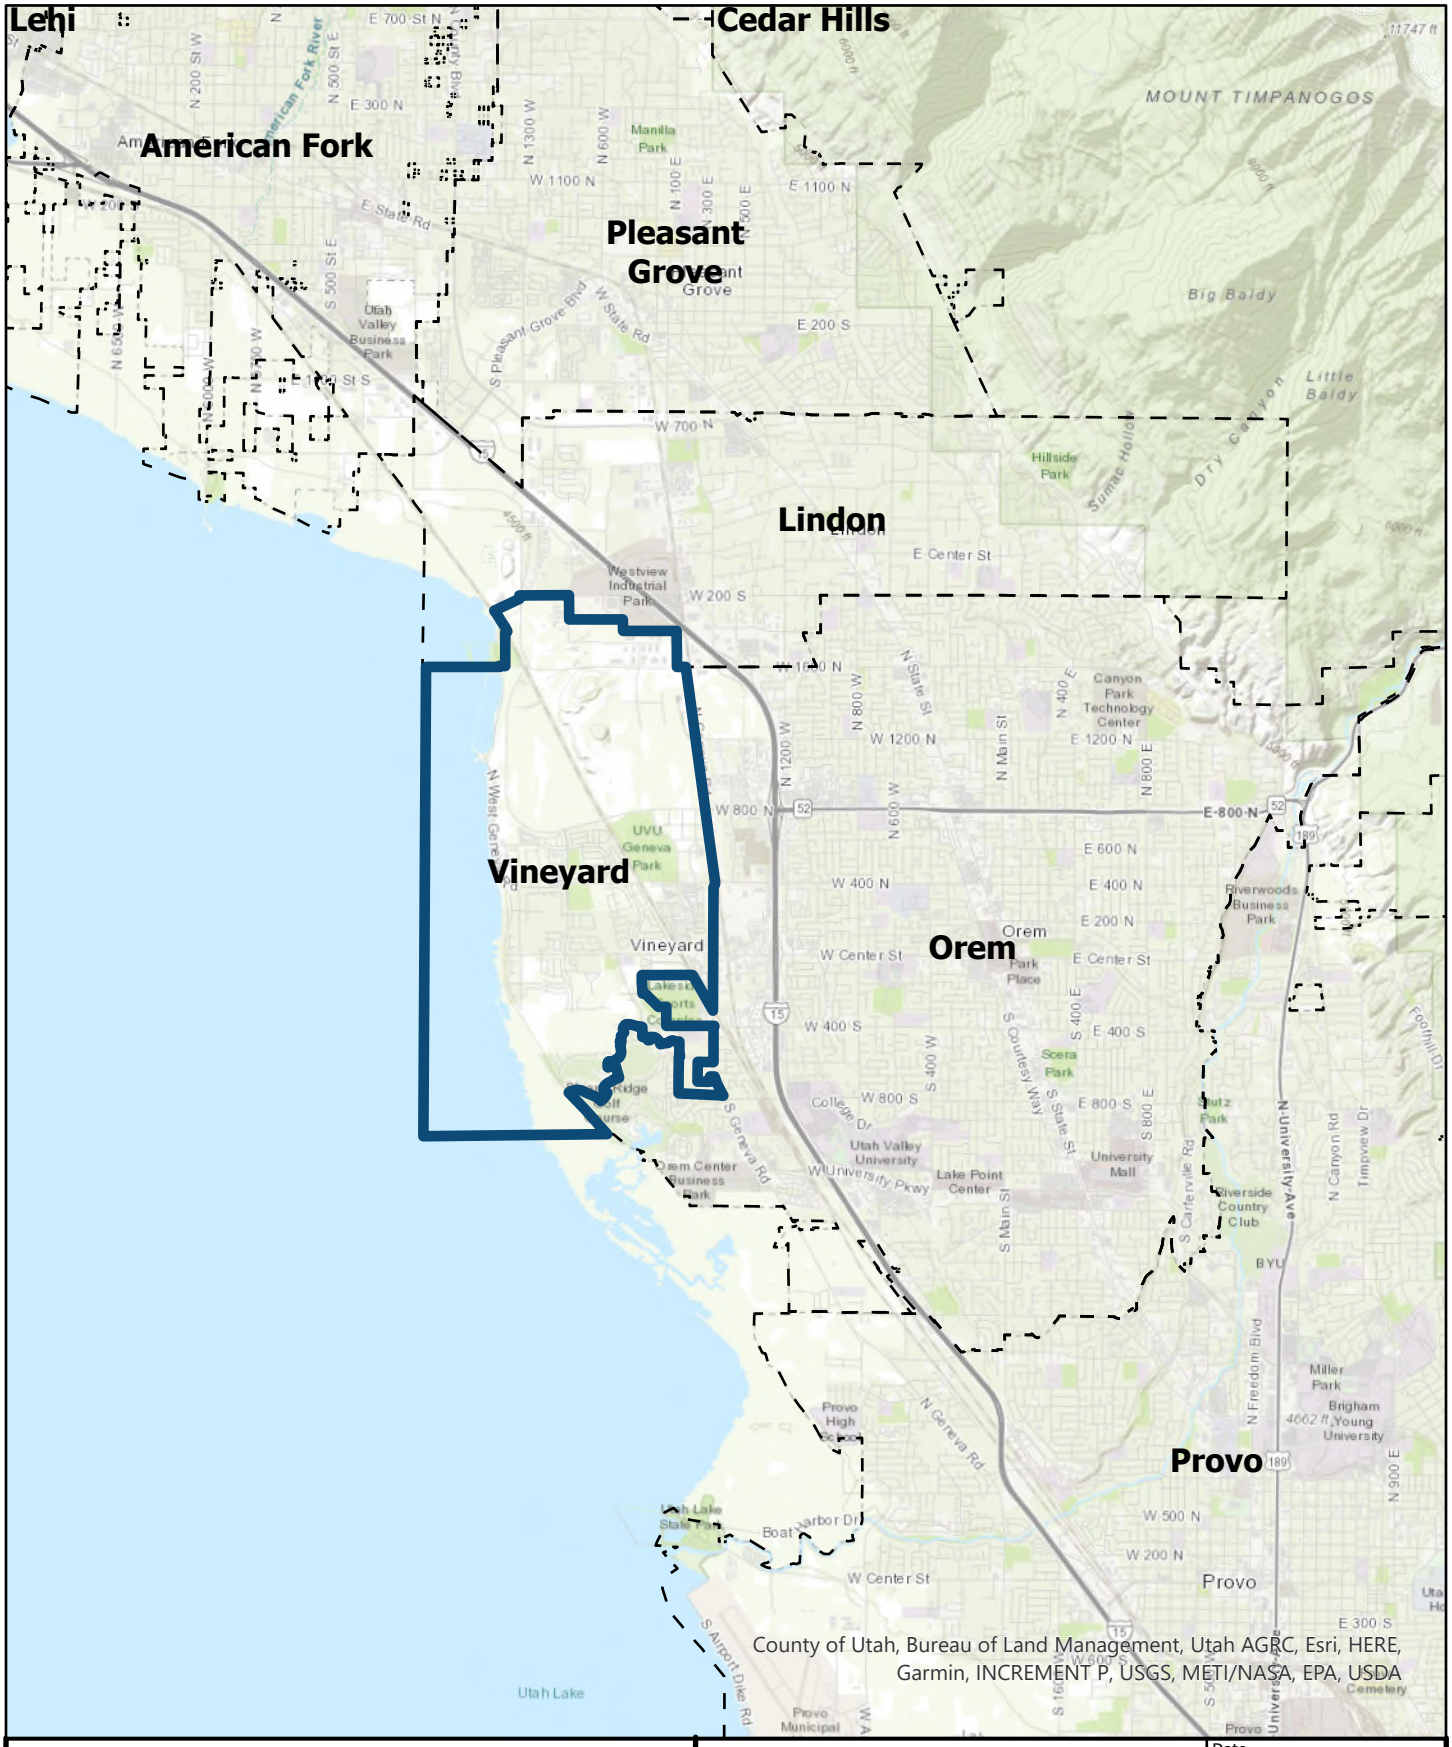

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Vicinity Map

Date: 3/29/2025

Project: UT23-2453

Figure 1

DEMOGRAPHICS

This section discusses the demographics of Vineyard City and provides helpful information about how people live, work, and play. These characteristics have a direct impact on the transportation needs of the City. The existing demographics data come primarily from U.S. Census data, including the American Community Survey results.

POPULATION

The population in Vineyard City has grown rapidly in recent years, making it the fastest growing city in Utah. According to the U.S. Census, the population in 2010 was 139. It is estimated that the population in 2023 was approximately 14,500. The median age of the population is approximately 24.8 years, and approximately 29 percent of the population is 18 years or younger.

Population (2023):
14,500

HOUSEHOLDS

Similar growth has occurred for the number of households in Vineyard. According to the U.S. Census, the number of households in Vineyard was 43 in the year 2000. The estimate for households rose to approximately 4,379 in 2023. It is estimated that there are approximately 3.09 persons per household.

Approximately 44 percent of the housing units in the city are owner-occupied with 52 percent of homes being single-family detached units, and the rest being apartments, condos, townhomes, mobile homes, etc. Approximately 98 percent of the residents of Vineyard have moved into the city since 2010. Related to transportation demand, approximately 94 percent of households have at least one vehicle available for use, and approximately one-fourth of households have at least three vehicles.

Households (2023):
4,379

EMPLOYMENT & JOURNEY TO WORK

As of 2023, over 6,100 Vineyard residents were employed, and the median household income was $100,022. Unlike population, the employment opportunities within the City have not seen significant growth until the last few years. Vineyard has seen an increase in regional retail developments along Mill Road between 400 North and 800 North. Data were collected from the U.S. Census American Community Survey results for Vineyard to determine the mode split in the City. The recent mode split in the city based on survey results from 2022 is shown in Figure 2.

As shown, just under three-fourths of workers drive alone in a personal vehicle to work. Approximately 11.5 percent carpool and 3.1 percent ride transit. It is anticipated that as transit, pedestrian, and bicycle facilities improve in the city the percentage of personal vehicle usage for commuting will decrease. The average commute time to work for Vineyard City residents is 20 minutes.

Avg. Commute:
20 min.

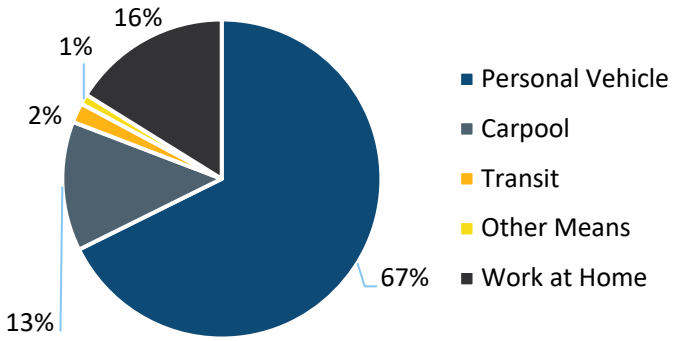

Figure 2: Vineyard mode split

LAND USE

This section discusses plans for existing and future land use in Vineyard City. Land use is a good predictor of transportation trends and demand. Therefore, it is important to identify existing and future land use when planning for transportation needs. There are several parcels within the City limits that are anticipated to experience development in the near future, especially along the Vineyard Connector corridor. Other areas that already have some developed land will experience in-fill development projects that will increase the density of land uses.

Most of Vineyard City currently consists of residential uses. Existing commercial and office developments are primarily located along the Mill Road corridor. Other land uses that are currently located in the City are K-12 public schools, City buildings, religious buildings, and medical care facilities. In preparation to complete this TMP, Vineyard City staff summarized the projects and land uses that are anticipated to develop in the next twenty years and beyond to help determine future transportation demand in the City.

The baseline (2023) and future job and employment numbers for each traffic analysis zone (TAZ) are summarized in Table 1. Detailed TAZ data is proved in the Appendix. Graphical representations of the household and population growth are provided in Figure 3 and Figure 4.

Table 1: Vineyard TAZ summary

Year	Population	Households	Jobs
2023	17,637	5,583	9,042
2033	36,530	13,278	17,713
2050	56,256	22,582	30,594
Note: Some TAZ's are shared with neighboring cities, so the numbers here will be higher than Vineyard City's own land uses.			

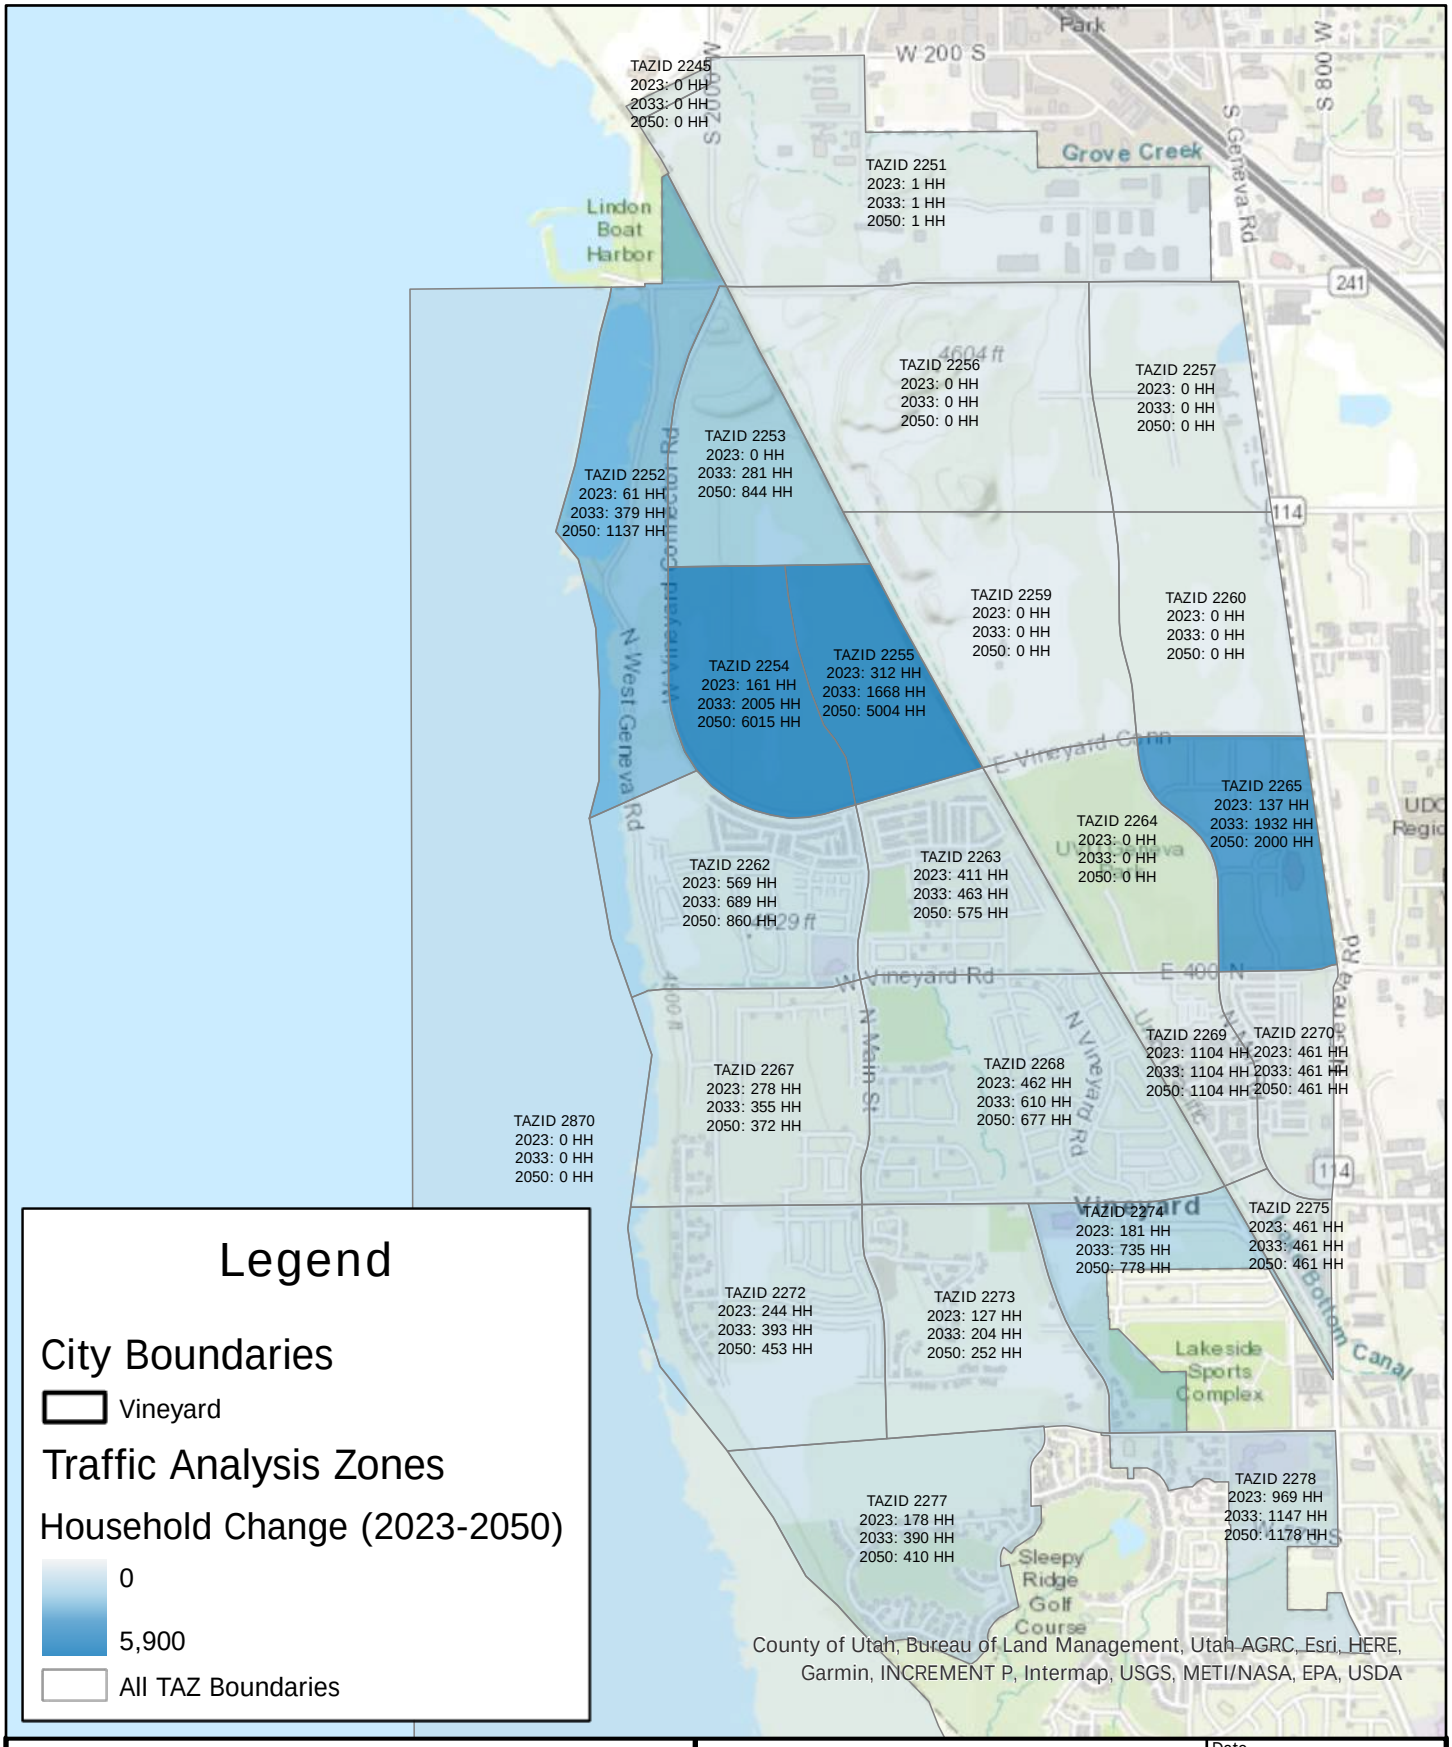

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Household Heat Map

Date: 6/13/2025

Project: UT23-2453

Figure 3

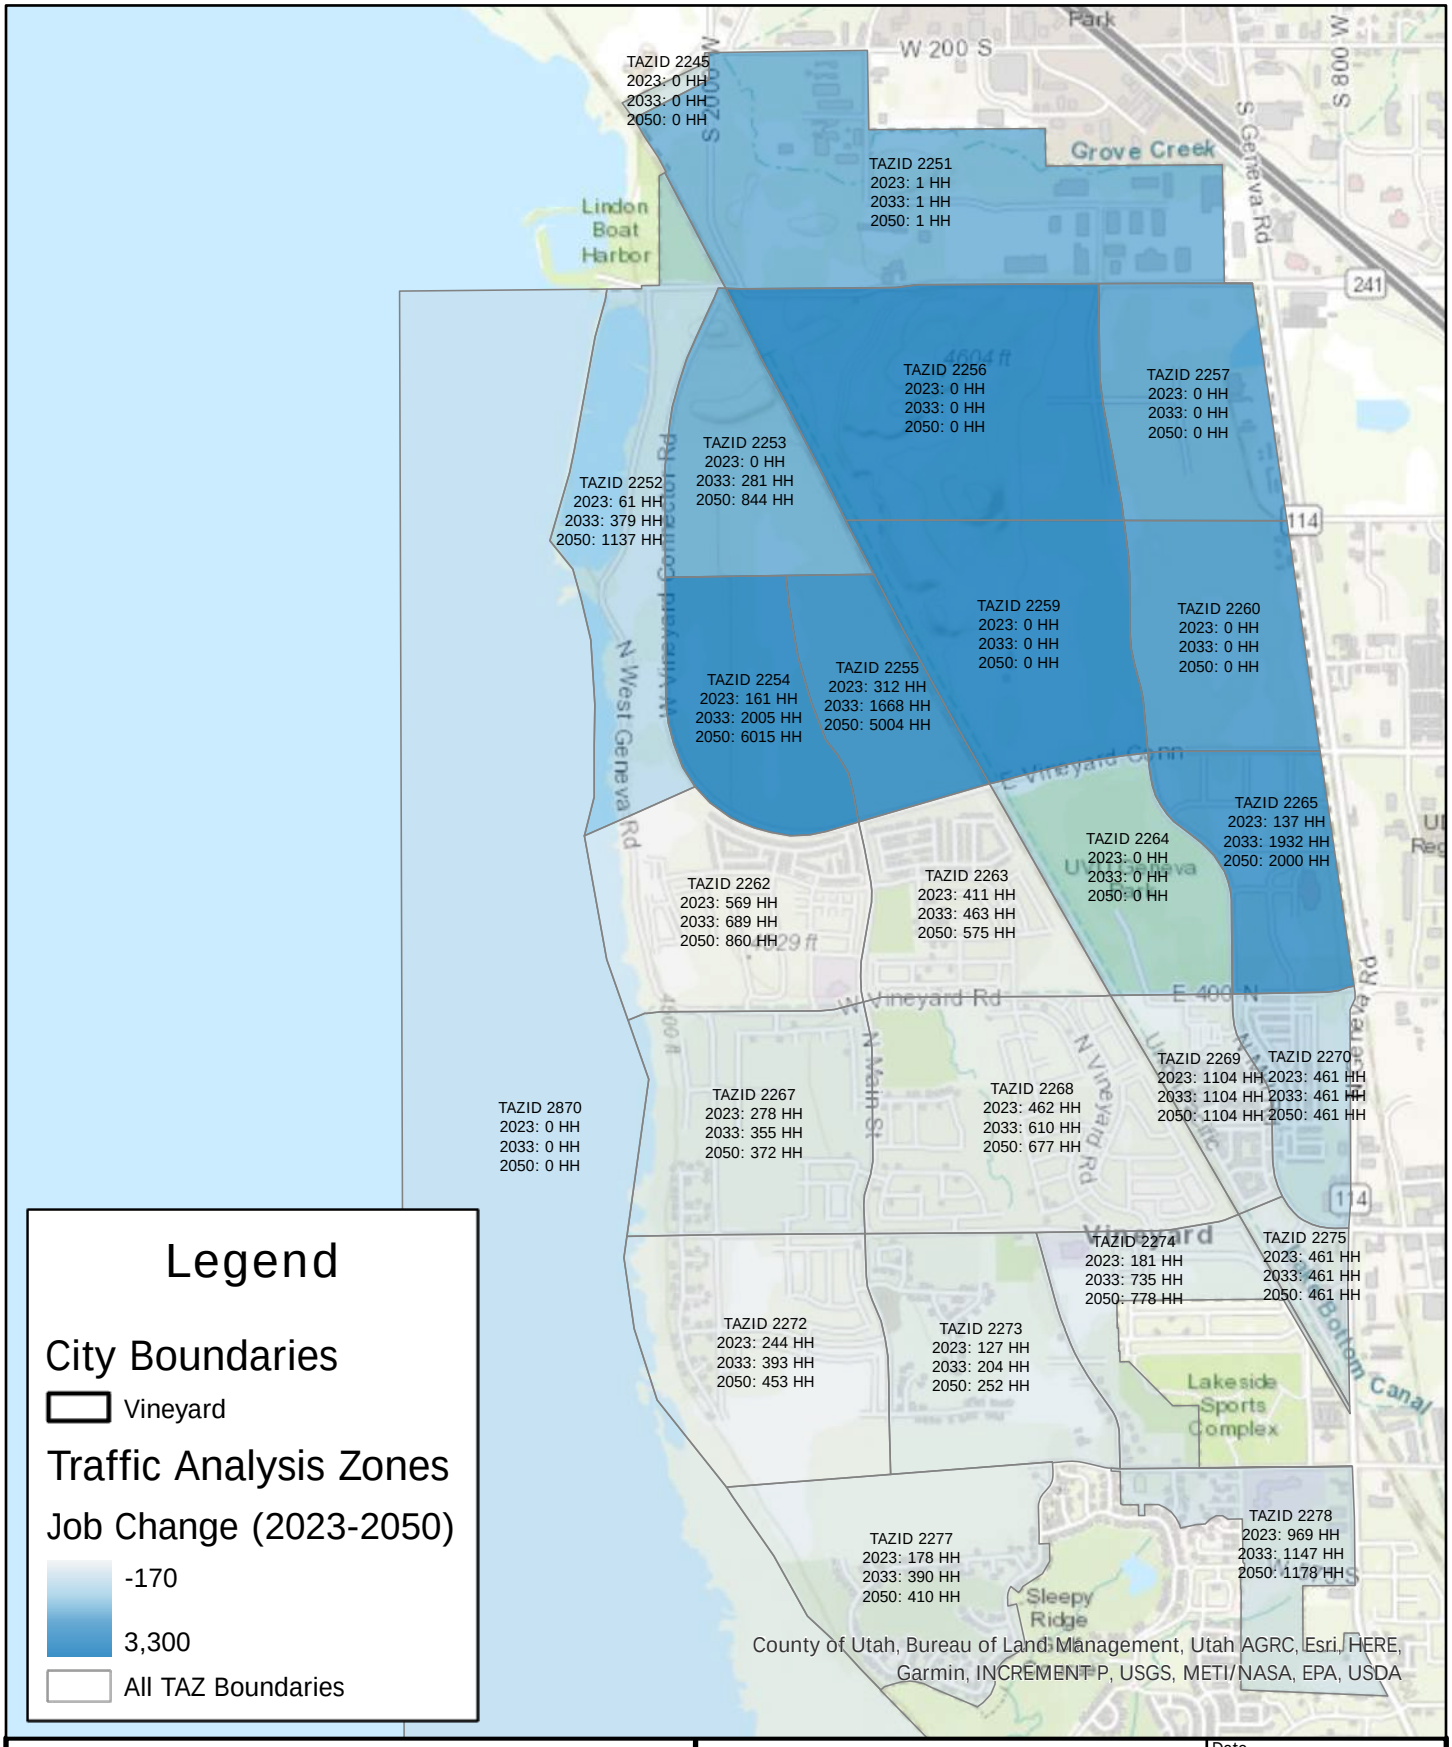

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Employment Heat Map

Date: 6/13/2025

Project: UT23-2453

Figure 4

TRAVEL DEMAND FORECASTING

Hales Engineering obtained the Mountainland Association of Governments (MAG) Travel Demand Model (v9). Based on the socioeconomic data within that model, various adjustments were made to be in line with the data and assumptions provided by Vineyard City staff. The future land use assumptions, as summarized above in Table 1, were applied to the Vineyard City Travel Demand Model to estimate future roadway volumes throughout the city for future years 2030 and 2050.

Based on the results of the no-build future (2030) and future (2050) volume projections, Hales Engineering determined deficiencies in roadway capacity under no-build conditions, which were then used as a factor in determining future roadway projects. The future travel demand models were then adjusted accordingly based on these projects to obtain future (2033) and future (2050) build conditions. The underlying assumptions, future projects, and results of these analyses are summarized within this document.

PUBLIC ENGAGEMENT

Local stakeholder involvement and engagement in any TMP is critical to understanding current conditions of the transportation network and to identifying needs for future improvement. Multiple public involvement activities were employed to provide outreach and opportunities for the public to provide input. These activities included one public open house, a community survey, and a web-based story map detailing project development. Additionally, multiple meetings with UDOT, MAG, UTA, Orem City staff, Lindon City staff, and the Vineyard City Council were held to keep key project stakeholders aware of the public input as well as study development.

SOCIAL MEDIA AND ONLINE COMMUNITY SURVEY

Vineyard City hosted a Facebook Live event on Tuesday, April 18, 2023 to educate the public on the TMP process and to spread word of the online survey and upcoming public input meeting and online story map. A basic presentation was given to explain the need for a TMP and the desire for public input to play a crucial road in the outcomes of the study.

An online community survey was created and disseminated via Vineyard City social media channels. The following TMP-related questions were asked in the survey:

1. Which of the following best describes you?
    a. Live, Work, Shop, and/or Recreate in Vineyard
2. How important are the following transportation modes to your personal travel in Vineyard?
    a. Personal Vehicles, Transit, Bicycle, Walking
        i. Five options ranging from “Not Important” to “Very Important”
3. How would you rate your experience with the following modes of transportation?
    a. Personal Vehicles, Transit, Bicycle, Walking
        i. Five options ranging from “Poor” to “Excellent”
4. How would you rate your current travel time in the morning peak hour
    a. “Congested and Slow,” “As Expected,” “Faster than Expected”

5. How would you rate your current travel time in the morning peak hour
    a. "Congested and Slow," "As Expected," "Faster than Expected"
6. How would you improve the Transportation Network in Vineyard
    a. Free Response for
        i. Personal Vehicles, Transit, Bicycle, Walking
7. How long is your commute to work? (optional)
    a. Free response in minutes
8. How often do you currently ride transit?
    a. "3+ days per week," "1-2 days per week," "1-3 days per month," "once every few months," "1-2 days per year," "never"
9. How often would you ride transit if you lived within a 5-minute walking distance of the Vineyard FrontRunner station?
    a. "3+ days per week," "1-2 days per week," "1-3 days per month," "once every few months," "1-2 days per year," "never"
10. From your experience, what is the most congested roadway or intersection during peak hours?
    a. (select on map)
11. What location in Vineyard City do you see as a safety concern for vehicles and/or pedestrians?
    a. (select on map)

A copy of the summarized responses from the online survey is provided in Appendix C. Locations that received comments regarding transportation are shown summarized in the map in Figure 5.

Public Input Meeting

- **Date and Time:** Tuesday April 25, 2023 from 5:30 - 8:30 PM
- **Location:** Freedom Preparatory Academy

An informal open-house style event was held to inform members of the public of the ongoing TMP as well as to obtain crucial public input via the online survey and in-person interactions. Multiple displays were used to convey the goals of the study and to communicate the importance of working with the public to find improvements in the Vineyard City transportation system. A map of the City was printed with markers to allow attendees to write and illustrate their concerns especially. A summary of many of the public comments from this meeting is provided in Table 2.

Table 2: Topics and Comments from the Public Input Meeting

Location	Comments
600 North / Main Street	Excessive eastbound queuing, need for alternative access to Vineyard Connector
600 North	Need more pedestrian crosswalks
Vineyard Loop Road	Speed limit too fast
FrontRunner Tracks	Need for pedestrian connectivity between east and west, potentially at 400 North
Lakeside Sports Park	Excessive congestion during sports season that spills onto Vineyard streets
Vineyard Connector	Need more pedestrian/bike connectivity to connect town to FrontRunner station

City Council Meetings

Date and Time: Wednesday August 30, 2023, 6:00 PM
Location: Vineyard City Hall

An introductory presentation was given, focusing on the elements of the TMP. These included the purpose and goals of the document, existing conditions throughout the city, and a summary of the public input provided to-date, projected future conditions, and potential projects to include to address future transportation-related concerns.

Date and Time: Wednesday March 6, 2024, 6:00 PM
Location: Vineyard City Hall

An follow-up presentation was given, focusing on progress of the TMP with emphasis on the future alignment of a proposed expressway/high-capacity arterial connection from Geneva Road to 1600 North, which will relieve congestion on the current Vineyard Connector alignment and provide a true parallel route to I-15. Additionally, level of service results from the future travel demand model projections were provided and discussed in conjunction with this expressway proposal.

Date and Time: Wednesday May 14, 2024, 6:00 PM
Location: Vineyard City Hall

A final transportation master plan presentation to the City Council, including final projects and findings.

Online Story Map

A study-specific online webpage was created in April 2023 as an additional resource through the study process. The public were directed to access the page at the public input meeting and via City social media channels. The story map was hosted at www.vineyardutah.gov. A screenshot of the opening view of the webpage is shown in Figure 5.

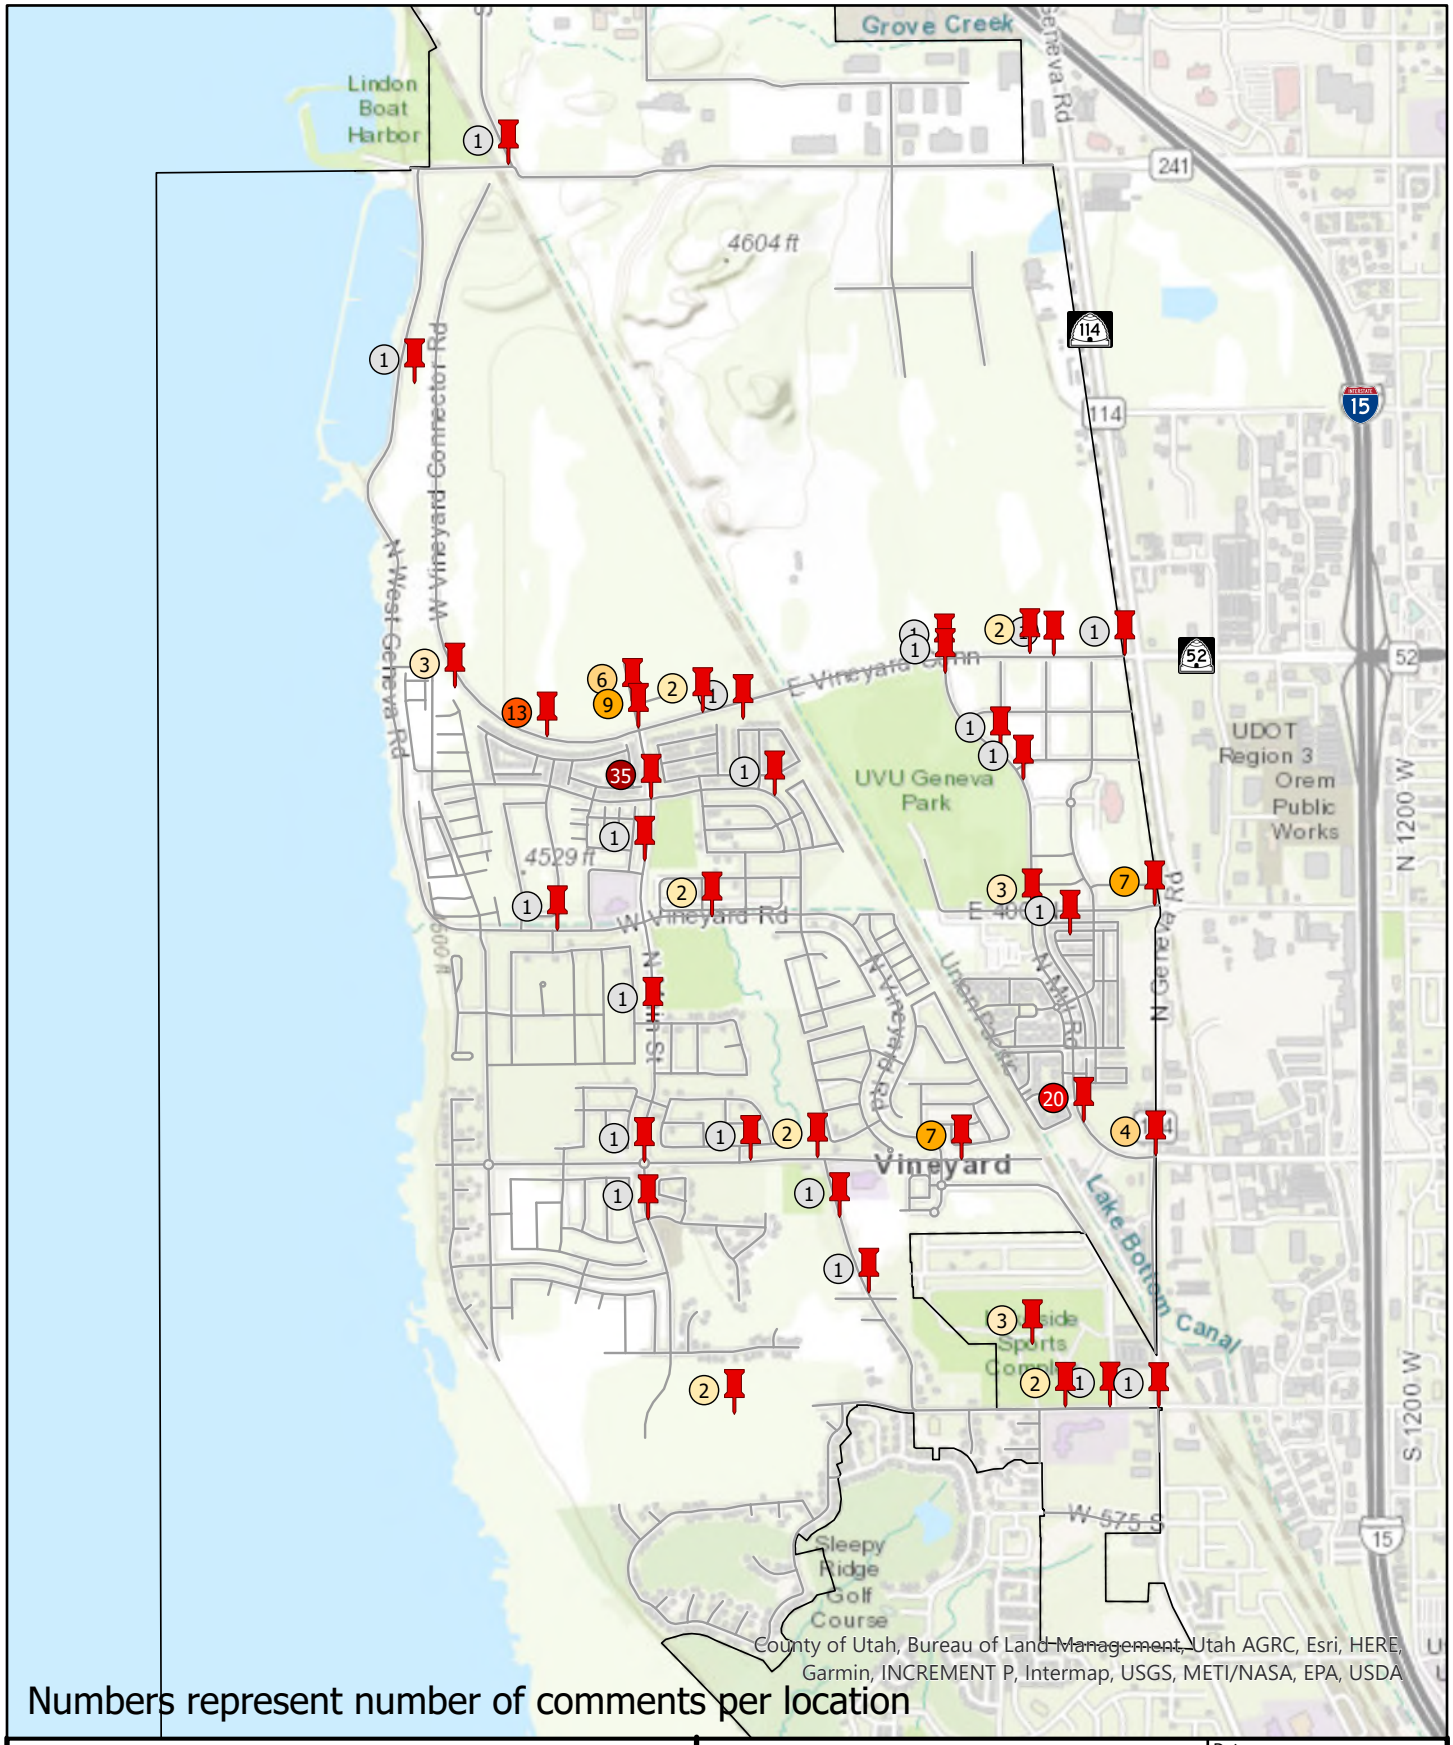

Numbers represent number of comments per location

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Community Input Locations

Date: 3/29/2025

Project: UT23-2453

Figure 5

ROADWAY NETWORK

PURPOSE

The purpose of this chapter is to discuss the characteristics and needs of the existing and future roadway networks. Recommendations for future improvements are discussed as well, based on the future projections. The analysis methodologies and models that were used are also discussed.

FUNCTIONAL CLASSIFICATION

Roads are categorized into a hierarchal system and given a functional classification based on right-of-way (ROW) width. The higher a street classification, the more mobility it provides with limited access. Lower street classifications have less mobility, but more access. The four classifications defined in the Vineyard City code are arterials, major collectors, minor collectors, and local streets.



The following are the four typical street classifications for Vineyard City roadways:

- Arterial – Arterials are designed to have greater mobility and connect traffic between population centers and regional attractions. Because of their increased mobility, arterials typically have higher speeds and a high degree of access control, with the exception of some historical sections. Major Arterials have a ROW of 96 or more feet while minor arterials have a ROW of 73 feet.
- Collector – Major collector roads are designed to connect with and augment the arterial system and provide access control. Generally, these streets are intended to carry traffic for shorter distances than arterials and have lower speeds. Major collectors have a ROW of 88 feet. A minor collector road is designed to carry low-speed traffic and provides greater access than major collectors. Minor collector roads are also designed for greater mobility than local streets as they are generally wider and as a result have less side friction with on-street parking. Minor collectors have a ROW of 63 feet.
- Local Street – Local streets are designed for accessibility and have less mobility than any other functional classification. The primary purpose of these is to provide access to surrounding properties and carry low-speed traffic. Some local streets may be designed to discourage through-traffic in neighborhoods. Local streets have a ROW of 58 feet.

A summary of the Vineyard roadway classifications is shown in Table 3. Typical cross-sections were designed for each of the Vineyard street classifications primarily based on the existing City cross-section standards and standard engineering practice. These are shown in Figures 3 through 7. These cross-sections do not necessarily match existing roadway cross-sections but are recommended cross-sections for new and improved roadways in the future. Bike treatments are not included in these concepts and may require additional ROW and/or pavement. The colors shown in Table 3 correspond to colors shown in both the cross-section figures and the roadway network figures shown later in the document. The Principal Arterial classification is being introduced based on future roadway improvement recommendations and has a seven-lane cross-section to accommodate higher demands.

Table 3: Roadway Classifications

Mobility

Access

Vineyard Roadway Classifications	
Classification	**Characteristics**
Major Arterial	ROW: 96+ feet 5 lanes
Minor Arterial	ROW: 73 feet 2-3 Lanes
Major Collector	ROW: 88 feet 3 Lanes
Minor Collector	ROW: 63 feet 2 Lanes
Local Street	ROW: 58 feet 2 Lanes

LEVEL OF SERVICE ANALYSIS

Level of service (LOS) is a term that describes the operating performance of an intersection or roadway. LOS is measured quantitatively and reported on a scale from A to F, with A representing the best performance and F the worst. Calculating a planning-level LOS for a roadway segment is completed based on volume-to-capacity (v/c) ratios. The volume is the average daily traffic (ADT) for the given roadway segment and the capacity is based on factors such as lane count and traffic signal spacing.

Table 4 provides a brief description of each LOS letter designation and the accompanying range of v/c ratios. A visual representation of the various levels of service is shown in Figure 9.

For the purposes of this TMP, a minimum overall performance for each of the study roadways and intersections was set at the levels of service shown below. These acceptable thresholds for various City roads were set based on discussions with the City to prioritize good flow on lower classification roads while also allowing for some congestion to encourage walkability in the downtown (Utah City) area.

City Road Threshold			
LOS	Local	Collector	Arterial
A			
B	Acceptable		
C		Acceptable	
D			Acceptable
E			
F			

Downtown Road Threshold			
LOS	Local	Collector	Arterial
A			
B			
C	Acceptable		
D			
E		Acceptable	Acceptable
F			

Data was collected utilizing annual daily traffic counts and turning movement counts at key intersection and roads. A map showing the data collection locations is shown in Figure 10.

Major Arterial (5 Lanes)

Major Arterial (5 Lanes)
96+' *ROW*

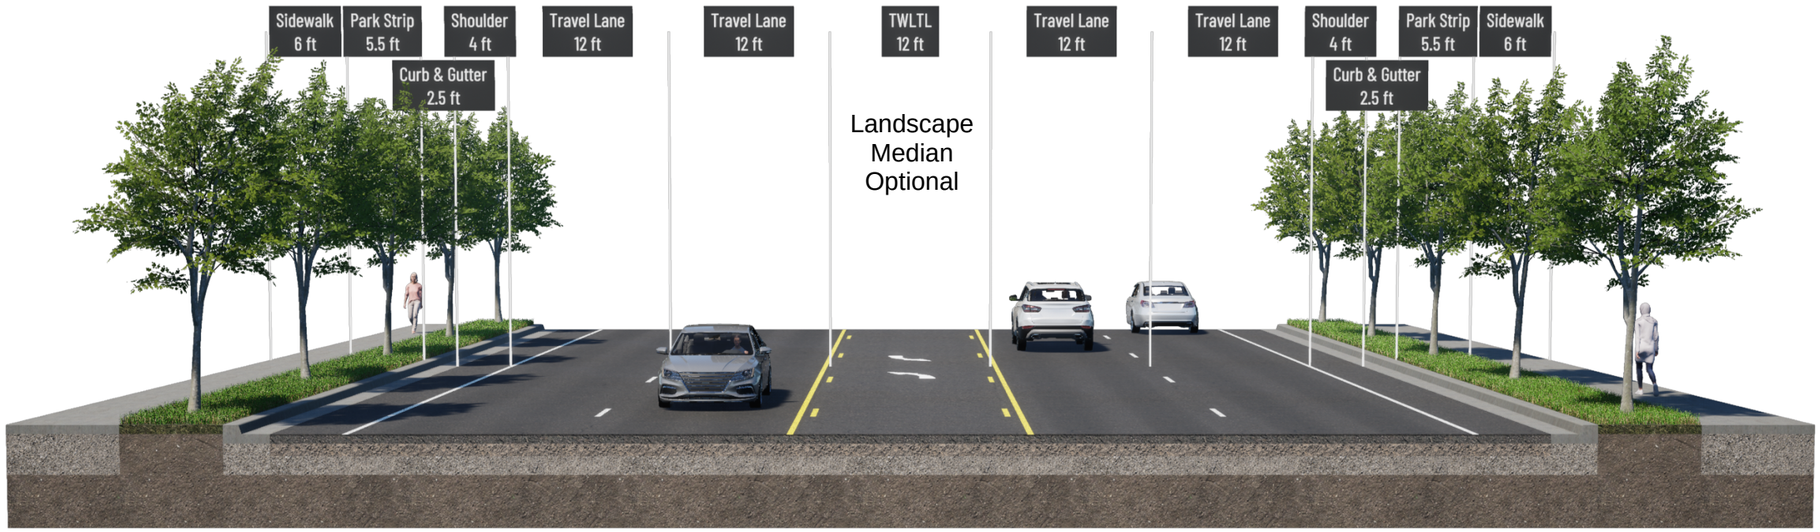

Minor Arterial (3 Lanes)

Minor Arterial (3 Lanes)
73' *ROW*

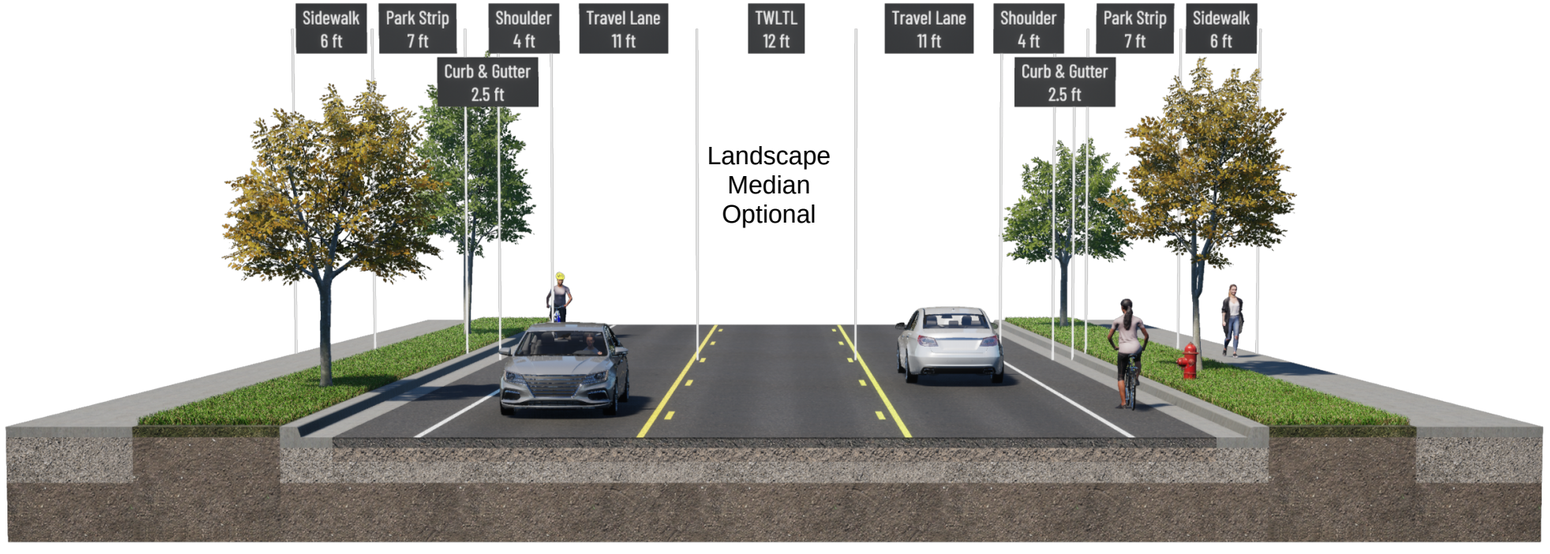

VINEYARD
STAY CONNECTED

HALES ENGINEERING
innovative transportation solutions

Arterial Cross Sections

Vineyard TMP

DATE 09/05/2025
PROJECT UT23-2453
Figure 6

Major Collector (3 Lanes)

Major Collector (3 Lanes)
88′ *ROW*

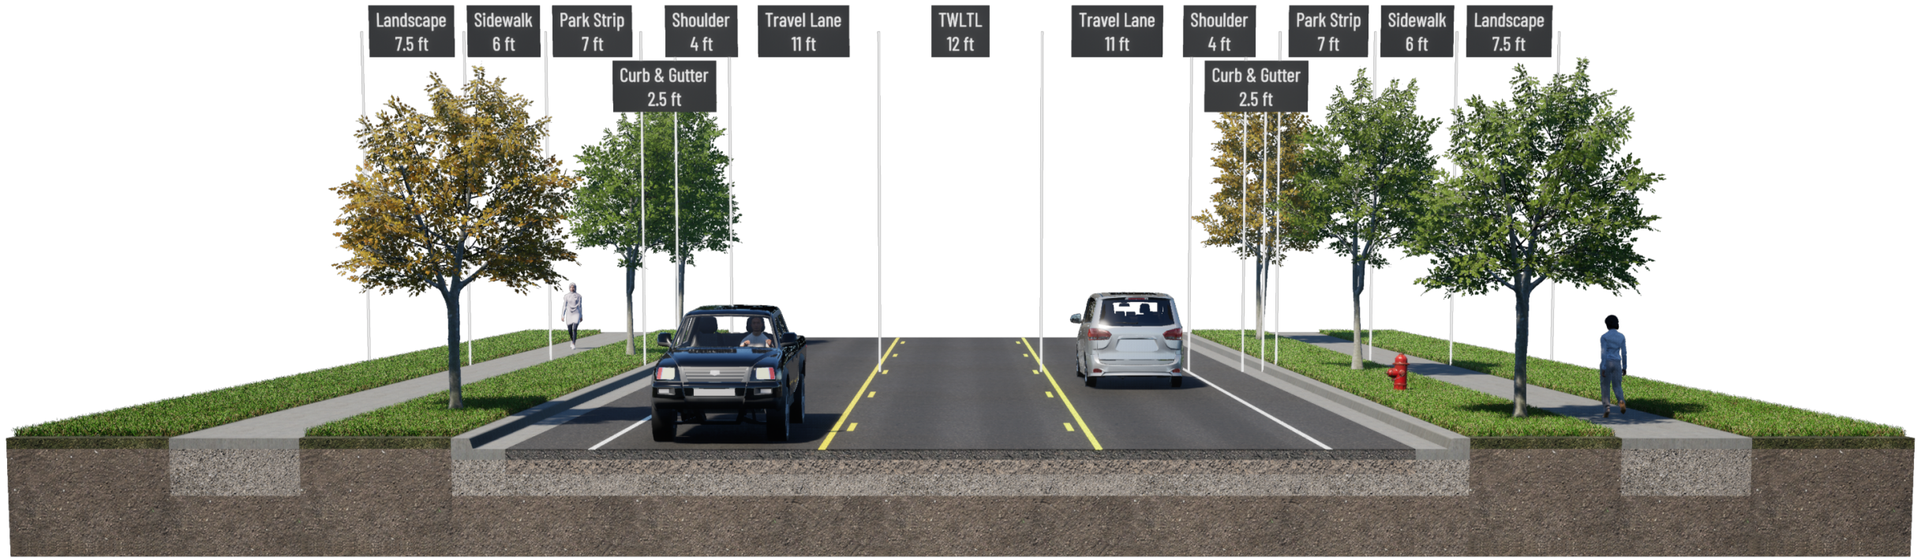

Minor Collector (2 Lanes)

Minor Collector (2 Lanes)
63′ *ROW*

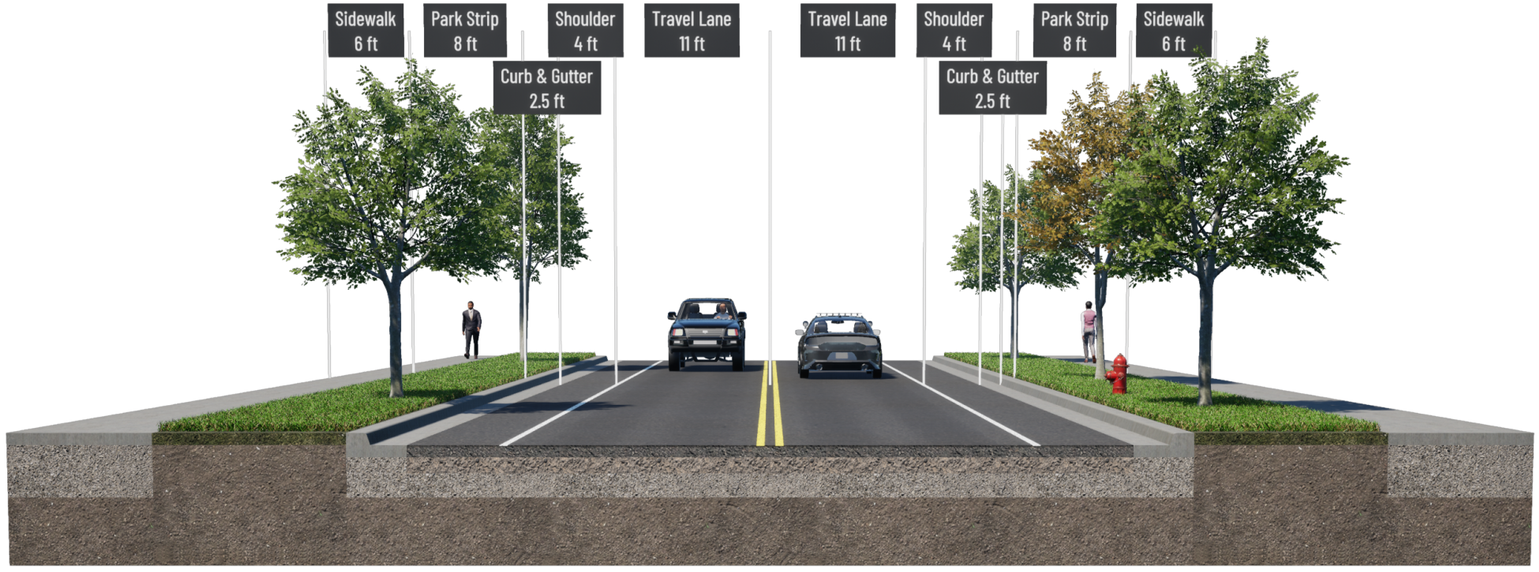

VINEYARD
STAY CONNECTED

HALES ENGINEERING
innovative transportation solutions

Collector Cross Sections

Vineyard TMP

DATE 09/05/2025

PROJECT UT23-2453

Figure 7

Local (2 Lanes)

Local (2 Lanes)
58' *ROW*

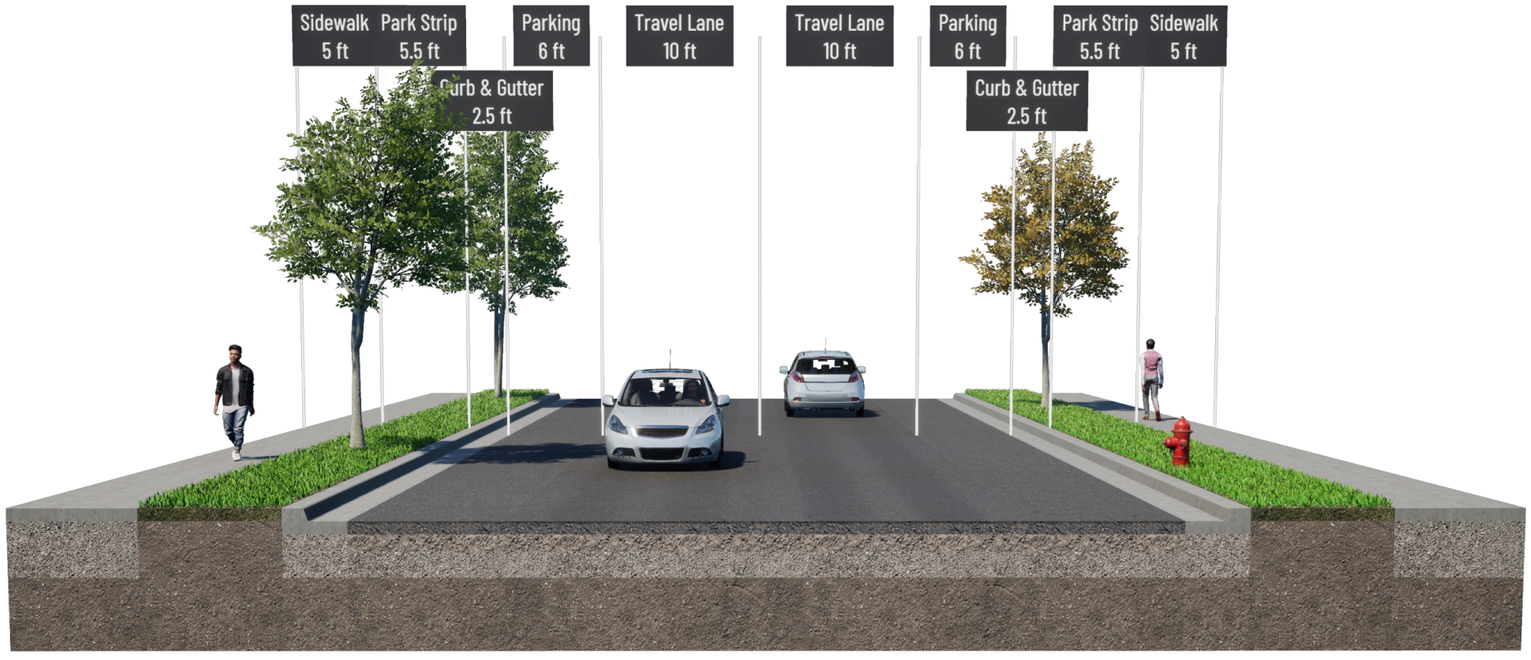

VINEYARD
STAY CONNECTED

HALES ENGINEERING
innovative transportation solutions

Local Cross Section

Vineyard TMP

DATE 09/08/2025

PROJECT UT23-2453

Figure 8

Table 4: Level of Service Descriptions

Level of Service	Description of Traffic Conditions	Volume / Capacity Ratio
A	Extremely favorable progression and a very low level of control (intersection) delay. Individual users are virtually unaffected by others in the traffic stream.	≤ 0.30
B	Good progression and a low level of control delay. The presence of other users in the traffic stream becomes noticeable.	> 0.30 - 0.50
C	Fair progression and a moderate level of control delay. The operation of individual users becomes somewhat affected by interactions with others in the traffic stream.	> 0.50 - 0.75
D	Marginal progression with relatively high levels of control delay. Operating conditions are noticeable more constrained.	> 0.75 - 0.85
E	Poor progression with unacceptably high levels of control delay. Operating conditions are at or near capacity.	> 0.85 - 1.00
F	Unacceptable progression with forced or breakdown operating conditions.	> 1.00

Source: *Highway Capacity Manual* (HCM) 7th edition (Transportation Research Board, 2022).

Level of Service (LOS)
LOS A – Free Flow, Insignificant Delays
LOS B – Stable Flow, Minimum Delays
LOS C – Stable Flow, Acceptable Delays
LOS D – Approaching Unstable Flow, Tolerable Delays
LOS E – Unstable Flow, Significant Delays
LOS F – Forced Flows, Excessive Delays

Figure 9: Visual representation of LOS

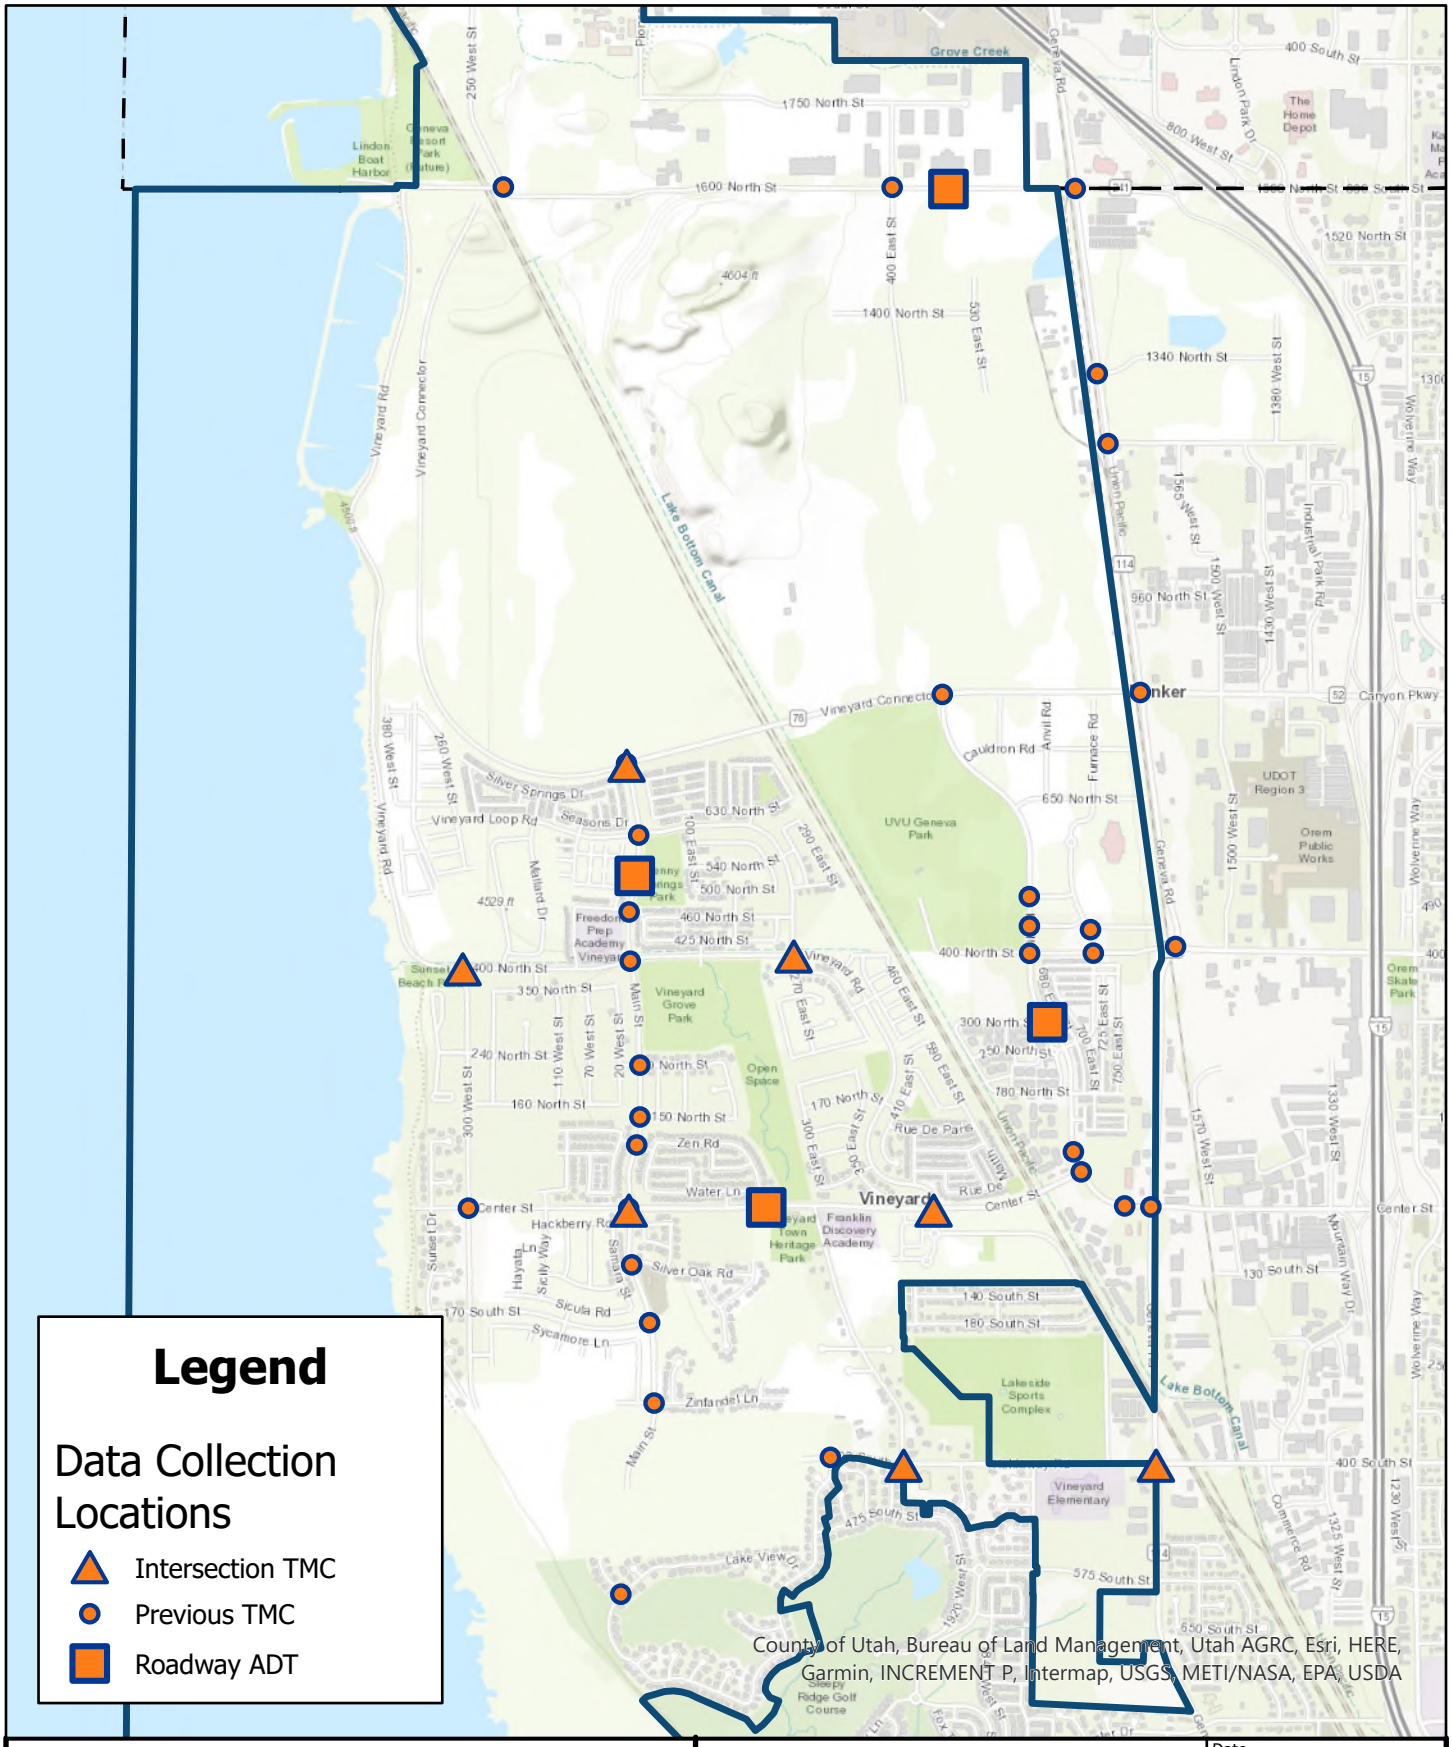

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Data Collection Locations

Date: 3/29/2025

Project: UT23-2453

Figure 10

ROADWAY CAPACITIES

The capacities for each roadway type were identified using Transportation Research Board (TRB) *Highway Capacity Manual,* 7th Edition, 2022 methodologies and based on common practice in Utah. Key factors that influence the capacity of a roadway include the number of travel lanes, presence of a two-way left-turn lane (TWLTL) or turn pockets, level of access management, and signal spacing. The assumed LOS capacity thresholds for Vineyard City roadways are shown in Table 5, reported as vehicles per day (vpd).

Table 5: Roadway Capacities

Functional Classification	Number of Lanes	Capacity (vpd)
Local	2	9,000
Minor Collector	2	11,600
Major Collector	3	13,700
Minor Arterial	3	15,600
Major Arterial	5	31,300

INTERSECTION LOS

Intersection LOS looks at individual intersections and provides a microscopic view of a roadway network. LOS at intersections can be broken down into directions and respective movements (left-turns, through movements, or right-turns). A detailed look at intersections should occur as frequently as necessary since they are a source of bottlenecks. The Highway Capacity Manual has divided intersections into two types, signalized and un-signalized. The methodology to calculate the delay per vehicle at an intersection is outlined in the *Highway Capacity Manual* (HCM), 7th Edition, 2022 and the subsequent delay criteria and corresponding LOS. A LOS D for intersection delay has been determined to be the acceptable limit for Vineyard City. The delay thresholds for each LOS for both signalized and unsignalized intersections can be found in Table 6.

The levels of service for signalized, all-way stop-controlled (AWSC), and roundabout intersections are calculated as a weighted average of all movements. The LOS for a two-way stop-controlled (TWSC) intersection is equal to the LOS of the worst movement. Failing LOS conditions are typically experienced during the peak hours (morning and/or evening). It is not uncommon for a side street or access on busy arterials to experience LOS worse than D during the peak hours due to high traffic volumes on the major roadway. Vehicles generally learn to re-route to signalized intersections in these cases.

Table 6: Intersection LOS Criteria

LOS	LOS Delay Criteria (sec. / vehicle)	
	Signalized Intersections	TWSC, AWSC, & Roundabout Intersections
A	≤ 10	≤ 10
B	> 10 - 20	> 10 - 15
C	> 20 - 35	> 15 - 25
D	> 35 - 55	> 25 - 35
E	> 55 - 80	> 35 - 50
F	> 80	> 50

Source: *Highway Capacity Manuel, 7th Edition, 2022*

EXISTING CONDITIONS

This section discusses the existing roadway and intersection conditions in Vineyard. The current LOS for each of the major roadways and intersections in Vineyard were analyzed. It is important to analyze the existing conditions as this serves as a baseline with which future conditions and alternatives can be compared.

EXISTING ROADWAY NETWORK

Major roadways in Vineyard have been designed on a grid system as is the pattern along much of the Wasatch Front as well. Many north-south and east-west roads are located approximately every 200 to 400 feet.

Main Street and Mill Road are the City's primary arterials through town. Geneva Road (SR-114) also serves much of Vineyard City on the eastern edge of town. Other major north-south roadways include Vineyard Road and 380 West. Center Street and Vineyard Connector Road (SR-176) are the primary east-west roadways. Other major east-west routes include 400 North and 400 South.

Local roadways in Vineyard are a mixture of grid systems in some areas and unconnected roads with cul-de-sacs in other areas. Discontinuous local road systems can lead to unnecessary congestion and delay on collector and arterial roads, as vehicles are forced to take those routes even for short trips. Therefore, it is recommended that the grid system be followed as much as possible as areas develop.

The functional classifications discussed previously were assigned to the roadways in Vineyard based on existing number of lanes. The existing roadway network map that shows the functional classifications is shown in Figure 11. Most roadways in Vineyard City are maintained by the City. Vineyard Connector Road (SR-176) and Geneva Road (SR-114) are state roadways maintained by the Utah Department of Transportation (UDOT). State and City

roadway jurisdictions are shown in Figure 12. The locations of traffic signals, stop signs, and other traffic control devices are shown in Figure 11.

ROADWAY IMPROVEMENTS

Through discussions with the city representatives, several locations around the City were considered phase 1 projects or projects that require immediate work. Phase one projects were mostly based at a few Geneva Road intersections and along Lake Boulevard. A list of phase 1 projects can be found in Table 7.

Table 7: Recommended Phase 1 Improvement Projects

#	Location	Type	Description	Jurisdiction
1	Lake Boulevard	Widen	Widen to 2 lanes	Vineyard
2	1600 North / Geneva Road Intersection	Intersection	Increase capacity	UDOT
3	300 West: Lake Boulevard Connection	New	2 lane / roundabout	Vineyard
4	400 North / Geneva Road Intersection	Intersection	Install traffic signal	UDOT
5	Center Street / Geneva Road Intersection	Intersection	NB dual LT lanes	UDOT

It is recommended that Lake Boulevard be widened to a full 2-lane width to accommodate vehicles traveling along the western edge of the City in both the northbound and southbound directions. This is a project that is currently in design at the time of this TMP.

Improvements are recommended at the UDOT-controlled 1600 North / Geneva Road and 400 North Geneva Road intersections. These improvements will take place after removal of the current rail lines on the west side of each intersection. It is also anticipated that the 400 North / Geneva Road intersection will be realigned and signalized when the west leg of the intersection is built, connecting the Vineyard roadway network to Orem at that location.

Dual northbound left-turn lanes are recommended at the Center Street / Geneva Road intersection based on existing deficiencies identified at the intersection in traffic impact studies conducted in the area for private developments. It is recommended that the City coordinate with UDOT on the timing of this improvement in conjunction with future widening plans on Geneva Road.

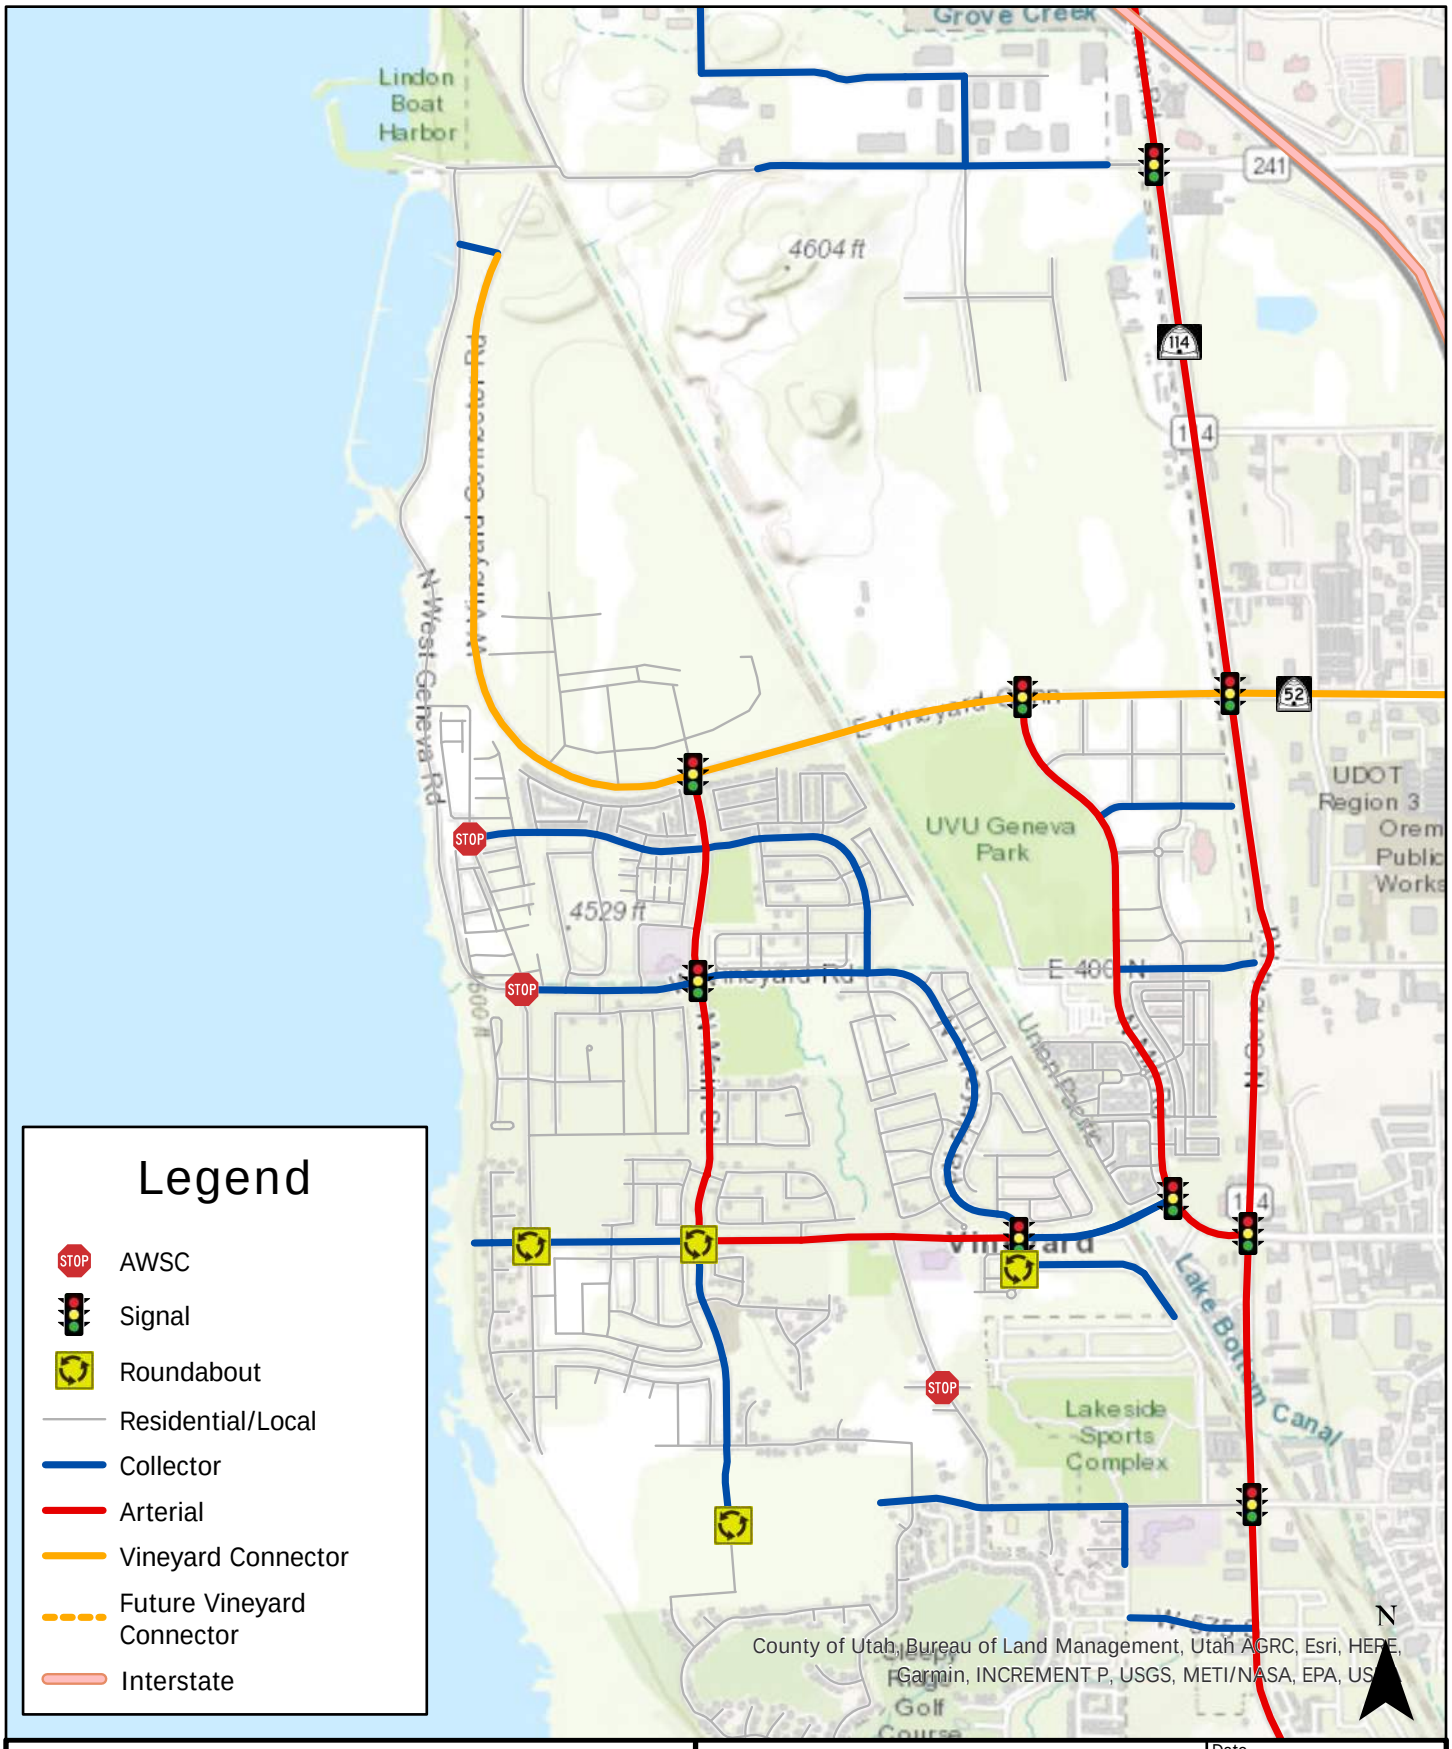

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Existing (2023) Roadway Network

Date: 6/17/2025
Project: UT23-2453
Figure 11

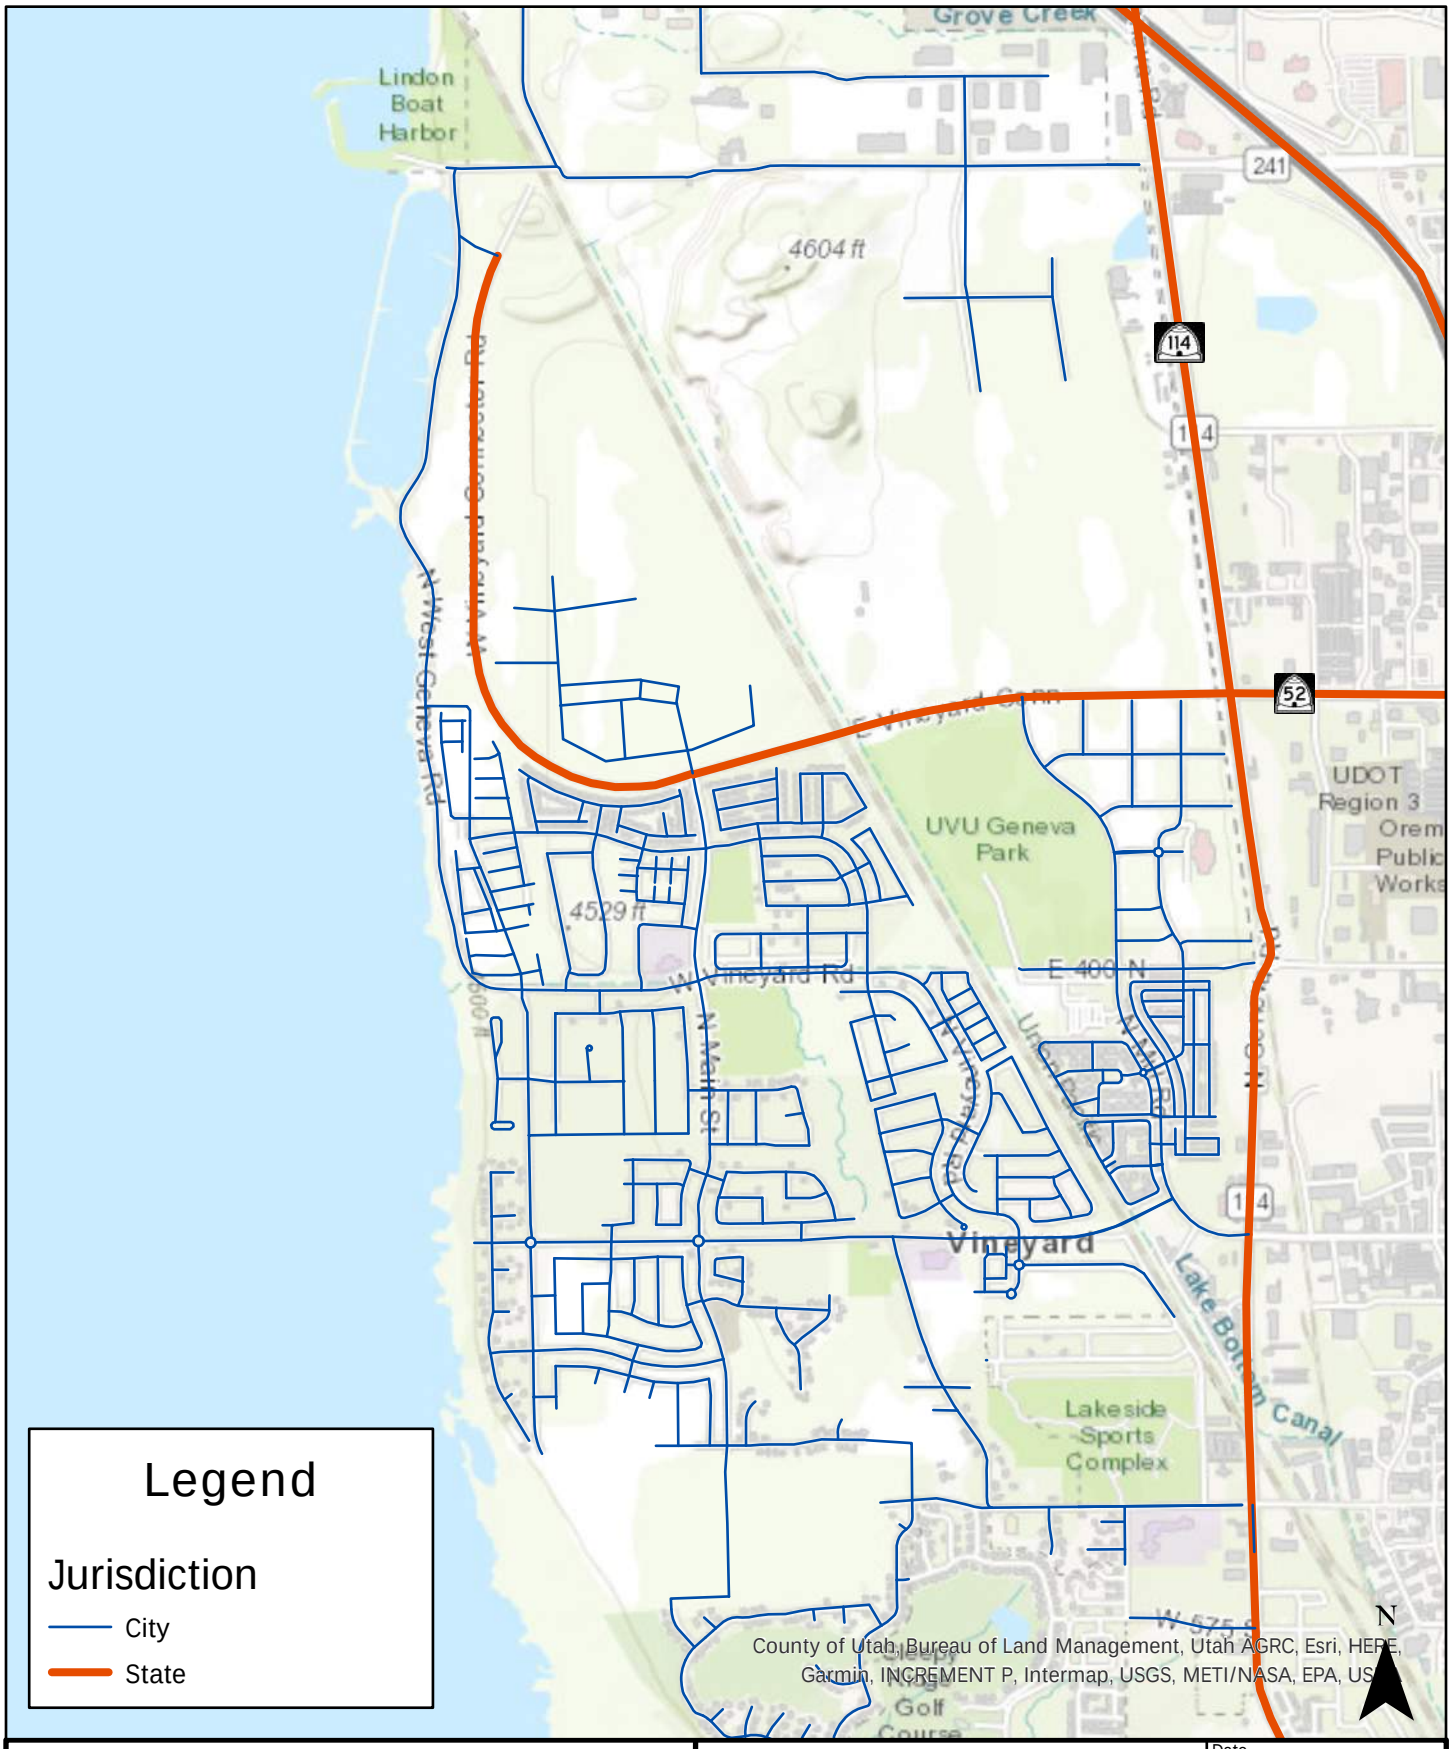

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Existing (2023) Roadway Jurisdiction

Date: 6/13/2025

Project: UT23-2453

Figure 12

EXISTING VOLUMES AND LOS

Roadways

In order to accurately identify existing conditions on the roadway network in Vineyard City, the consultant team gathered traffic data. Existing traffic volumes were obtained from various sources, including the following:

- Consultant Team Data – Where UDOT data were not available, the consultant team used data collected for this and previous projects in the area. These data were collected in the form of two-way roadway counts or turning movement counts at intersections and are included in Appendix B.
- UDOT - Many of the traffic volume values on State roads and other federal aid roads were obtained from UDOT's *Traffic on Utah Highways* database, Automatic Signal Performance Metrics (ATSPM) website, or from previous studies completed on UDOT roads.

The volumes from these sources were compiled to have a comprehensive volume map of all major roadways. LOS values were assigned to each roadway segment based on the volume and the LOS criteria for roadways that was described previously. The existing traffic volumes are reported as ADT in vpd along with the LOS of each roadway segment in Figure 13.

As shown, the roadways in Vineyard are currently operating within capacity, but three of the major intersections are currently operating at a poor LOS. These intersections include the 600 North / Main Street, 400 North / Geneva Road, and Mill Road / Geneva Road intersections.

Intersections

Evening peak hour turning movement count data were collected for several major intersections within the City. Hales Engineering completed morning evening peak hour turning movement counts between 7:00 and 9:00 a.m. and 4:00 and 6:00 p.m. at the following intersections on Tuesday, March 7, 2023; Wednesday, March 8, 2023, and Thursday, March 9, 2023:

- Main Street / Center Street
- Main Street / Vineyard Connector
- 300 West / Vineyard Road
- 270 East / Vineyard Road
- Holdaway Road / 400 South (Holdaway Road)
- 400 South / Geneva Road (SR-114)
- Vineyard Road / Center Street

Volume data at the following intersections were collected from previous traffic studies or from UDOT's ATSPM website or other databases:

- Center Street (Mill Road) / Geneva Road (SR-114)
- 1600 North / Geneva Road (SR-114)
- 800 North (Vineyard Connector) / Geneva Road (SR-114)

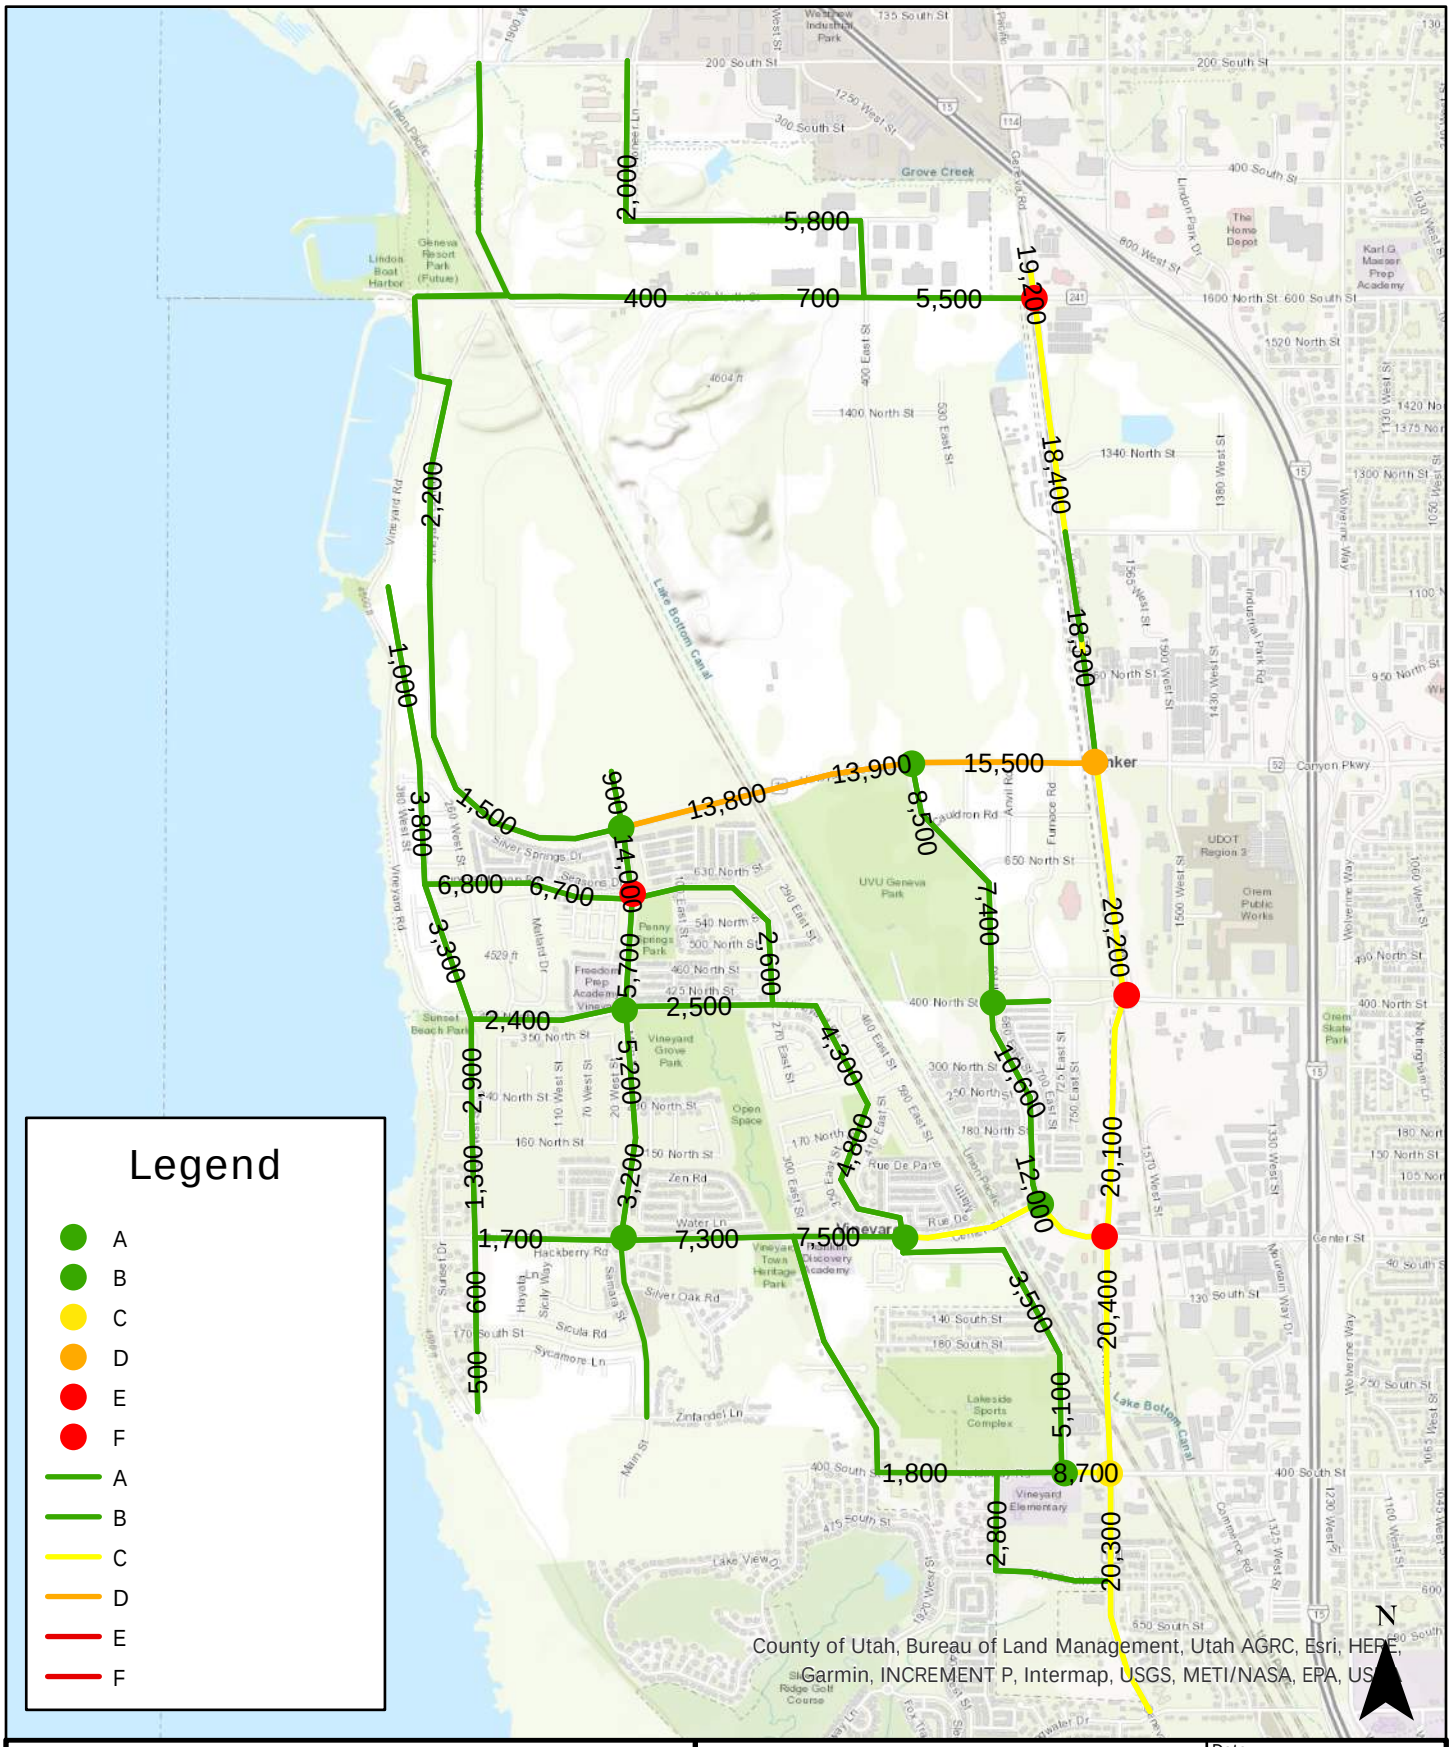

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Existing (2023) No-Build LOS

Date 8/13/2025

Project UT23-2453

Figure 13

An intersection LOS analysis was completed for all major intersections in the City. This analysis was completed for the evening peak hour using Synchro / SimTraffic traffic modeling and simulation software, which follow HCM methodology. The evening peak hour LOS was computed for each study intersection. Multiple runs of SimTraffic were used to provide a statistical evaluation of the interaction between the intersections. LOS results are shown in Table 8 and visually in Figure 13. Detailed LOS and queueing reports are provided in Appendix D.

The major intersections in Vineyard City with three exceptions are all operating at acceptable levels of service during the evening peak hour, as shown in Table 8.

Table 8: Existing Evening Peak Hour Intersection Level of Service

Intersection			Level of Service	
Description	Control	Movement[1]	Aver. Delay (Sec/Veh)	LOS[2]
Mill Road / Center Street	Signal	-	13.8	B
400 North / Main Street	Signal	-	10.1	B
600 North / Main Street	EB/WB Stop	EBL	>50	f
Vineyard Road / Center Street	Signal	-	8.8	A
400 North / Mill Road	EB/WB Stop	EBL	11.4	b
800 North (SR-176) / Main Street	Signal	-	9.1	A
800 North (SR-176) / Geneva Road (SR-114)	Signal	-	51.1	D
400 North / Geneva Road (SR-114)	WB Stop	WBL	>50	f
Mill Road / Geneva Road (SR-114)	Signal	-	>80	F
400 South / Geneva Road (SR-114)	Signal	-	22.8	C
Vineyard Road / 400 South	SB Stop	SBL	9.9	a

1. Movement indicated for unsignalized intersections where delay and LOS represents worst movement. SBL = Southbound left movement, etc.
2. Uppercase LOS used for signalized, roundabout, and AWSC intersections. Lowercase LOS used for non-AWSC unsignalized intersections.

Source: Hales Engineering, January 2025

A traffic signal is recommended at the 600 North / Main Street intersection as it is anticipated to meet signal warrants based on existing traffic volumes at that location.

It is also recommended that The 400 North / Geneva Road (SR-114) intersection be realigned and signalized, per future UDOT plans for when the Union Pacific railroad along Geneva Road is removed and the west leg of the intersection constructed.

It is recommended that Vineyard City staff coordinate with UDOT on dual northbound left-turn lanes at the Mill Road / Geneva Road (SR-114) intersection. This will increase capacity at the intersection and allow for better access from Geneva Road into Vineyard City.

FUTURE (2033) CONDITIONS

Future ADT roadway volumes were projected based on the anticipated development in the City. This was done based on future land use plans discussed previously in this report. These tasks were completed to determine roadway ADT volumes, which were then converted to turning movement counts at key intersections. Future traffic volumes were calibrated using existing traffic counts grown according to the Vineyard City Travel Demand model.

NO-BUILD LOS

LOS was analyzed for a scenario in which new roads had been constructed to support full development, but existing roads had not been widened (no-build condition). All new roads were assumed to comply with the Vineyard City standard cross sections for each functional classification. The no-build roadway and intersection LOS for future (2033) conditions is shown in Figure 14. Evening Peak Hour intersection LOS results are shown in Table 9. It is anticipated that the 600 North / Main Street intersection will still operate at a poor level of service without a traffic signal.

Table 9: Future (2033) No-Build Evening Peak Hour Level of Service

Intersection			Level of Service	
Description	Control	Movement[1]	Aver. Delay (Sec/Veh)	LOS[2]
400 North / Main Street	Signal	-	14.1	B
600 North / Main Street	EB/WB Stop	EBL	>50	f
Vineyard Road / Center Street	Signal	-	34.9	C
400 South / Geneva Road (SR-114)	Signal	-	50.5	D
Vineyard Road / 400 South	SB Stop	SBL	14.4	b

1. Movement indicated for unsignalized intersections where delay and LOS represents worst movement. SBL = Southbound left movement, etc.
2. Uppercase LOS used for signalized, roundabout, and AWSC intersections. Lowercase LOS used for non-AWSC unsignalized intersections.

Source: Hales Engineering, January 2025

ROADWAY IMPROVEMENTS

As Vineyard continues to develop, new roads will be constructed to connect developments to arterial streets. Additionally, improvements for future conditions were recommended for roadways that are anticipated to operate at a poor LOS. New roads and recommended improvements to city roadways are listed in Table 10. The recommended phase 2 roadway and intersections projects are shown in Figure 15. These projects were anticipated to be needed in phase 2 but may be constructed on an accelerated timeline. 400 South from Main Street to Lake View Drive is partially built at the time of this master plan and a signal is currently being designed for the 600 North / Main Street intersection.

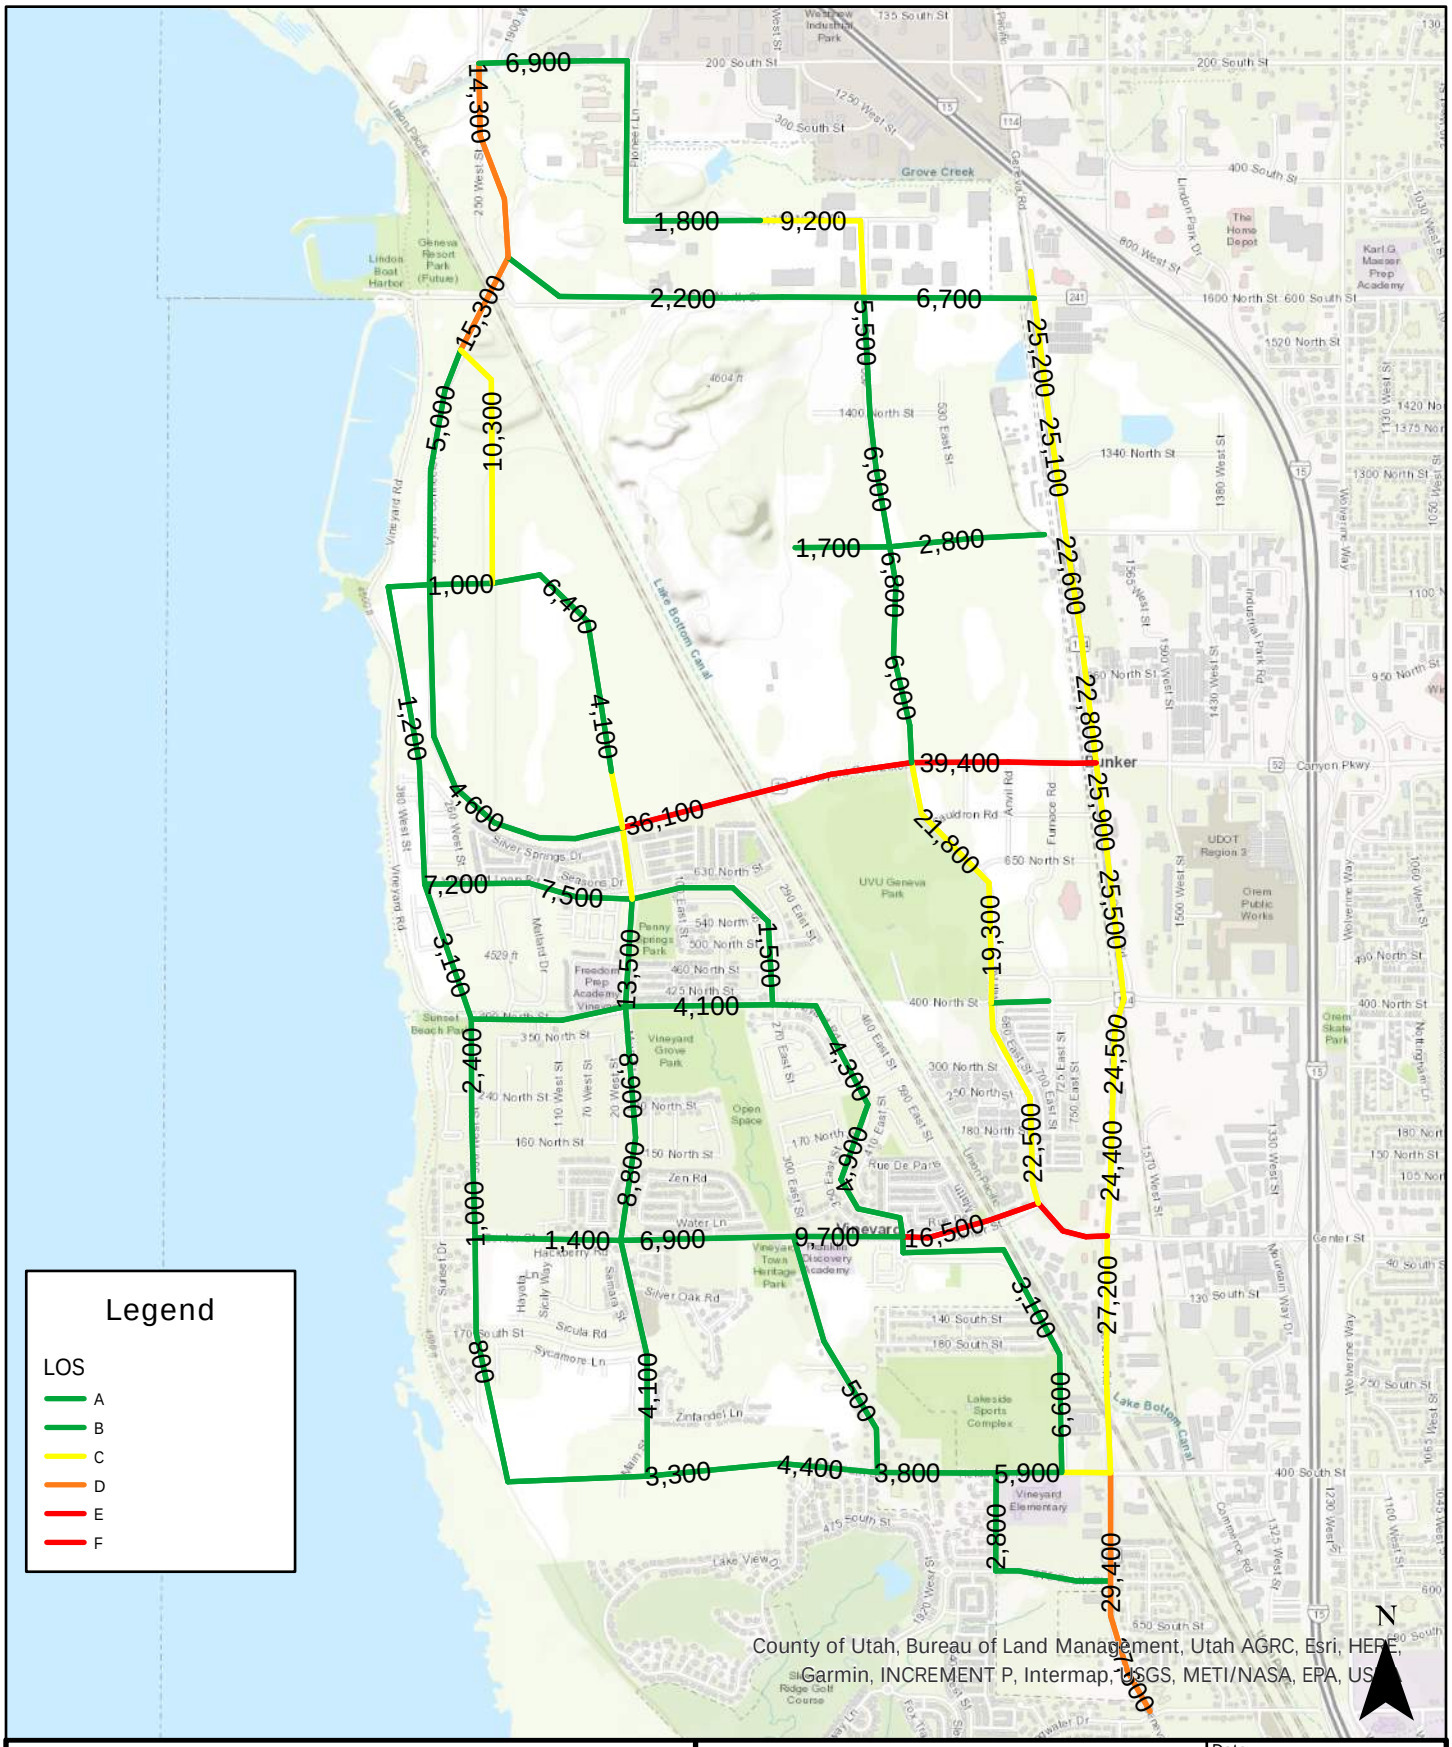

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2033) No-Build LOS

Date 8/13/2025

Project UT23-2453

Figure 14

Table 10: Recommended Phase 2 Improvement Projects

#	Location	Type	Description	Jurisdiction
1	Mill Rd: 1600 North to Vineyard Connector	New	Construct 5-lane roadway	Vineyard
2	1200 North: Utah City to Geneva Rd	New	Construct 5-lane roadway	Vineyard/UDOT
3	300 West / Vineyard Connector	New	Roundabout with leg for RT onto Vineyard Connector	Vineyard/UDOT
4	Vineyard Connector: Main St to Geneva Rd	Widen	Widen to 5 lanes	UDOT
5	600 North / Main St	Intersection	Install traffic signal	Vineyard
6	400 North: Rail Bridge to Mill Rd	Widen	Widen to 5 Lanes	Vineyard
7	400 North / Mill Rd Intersection	Intersection	Install traffic signal	Vineyard
8	Main St: Zinfandel Ln to 400 South	New	3-lane road	Vineyard
9	400 South: Main St to Lake View Dr	New	2-lane road	Vineyard
10	620 East / 400 South	Intersection	Install traffic signal	Orem/Vineyard

Hales Engineering recommends a connection to Vineyard Connector at 300 West to allow for an alternate outlet for residents in the surrounding neighborhood. This connection is proposed as a roundabout intersection with its eastern leg connecting to Vineyard connector in an added auxiliary lane that continues eastward until the Main Street / Vineyard Connector intersection.

It is anticipated that UDOT will widen Vineyard Connector to a 5-lane cross-section from Main Street to Geneva Road as a phase 2 project. This will allow for increased capacity on Vineyard Connector that will better serve the increased development in the city. To allow for better connectivity on the south side of Vineyard City, it is recommended that Main Street be extended as a 3-lane road from Zinfandel Lane to 400 South. Similarly, it is recommended that 400 South be extended west from Main Street to Lake View Drive as a 2-lane road.

BUILD LOS

With the proposed improvements, most Vineyard City roadways are anticipated to operate at LOS D or better, as shown in Figure 16. Exceptions to this include Center Street east of Vineyard Road and Mill Road south of Center Street. Future (2033) evening peak hour LOS results are shown in Table 11.

Table 11: Future (2033) Build Evening Peak Hour Build LOS

Intersection		Level of Service		
Description	Control	Movement[1]	Aver. Delay (Sec/Veh)	LOS[2]
400 North / Main Street	Signal	-	26.0	C
600 North / Main Street	Signal	-	13.3	B
Vineyard Road / Center Street	Signal	-	30.0	C
400 South / Geneva Road (SR-114)	Signal	-	54.1	D
Vineyard Road / 400 South	SB Stop	SBL	14.9	b

1. Movement indicated for unsignalized intersections where delay and LOS represents worst movement. SBL = Southbound left movement, etc.
2. Uppercase LOS used for signalized, roundabout, and AWSC intersections. Lowercase LOS used for non-AWSC unsignalized intersections.

Source: Hales Engineering, January 2025

FUTURE (2050) CONDITIONS

Future ADT roadway volumes were projected based on the anticipated development in the City. This was done based on future land use plans discussed previously in this report. These tasks were completed to determine roadway ADT volumes, which were then converted to turning movement counts at key intersections.

TRAFFIC VOLUMES

Future traffic volumes were calibrated using existing traffic counts grown according to the Vineyard City Travel Demand model.

NO-BUILD LOS

LOS was analyzed for a scenario in which new roads had been constructed to support full development, but existing roads had not been widened (no-build condition). All new roads were assumed to comply with the Vineyard City standard cross sections for each functional classification. The no-build roadway and intersection LOS for future (2050) conditions is shown in Figure 14. Evening Peak Hour intersection LOS results are shown in Table 13.

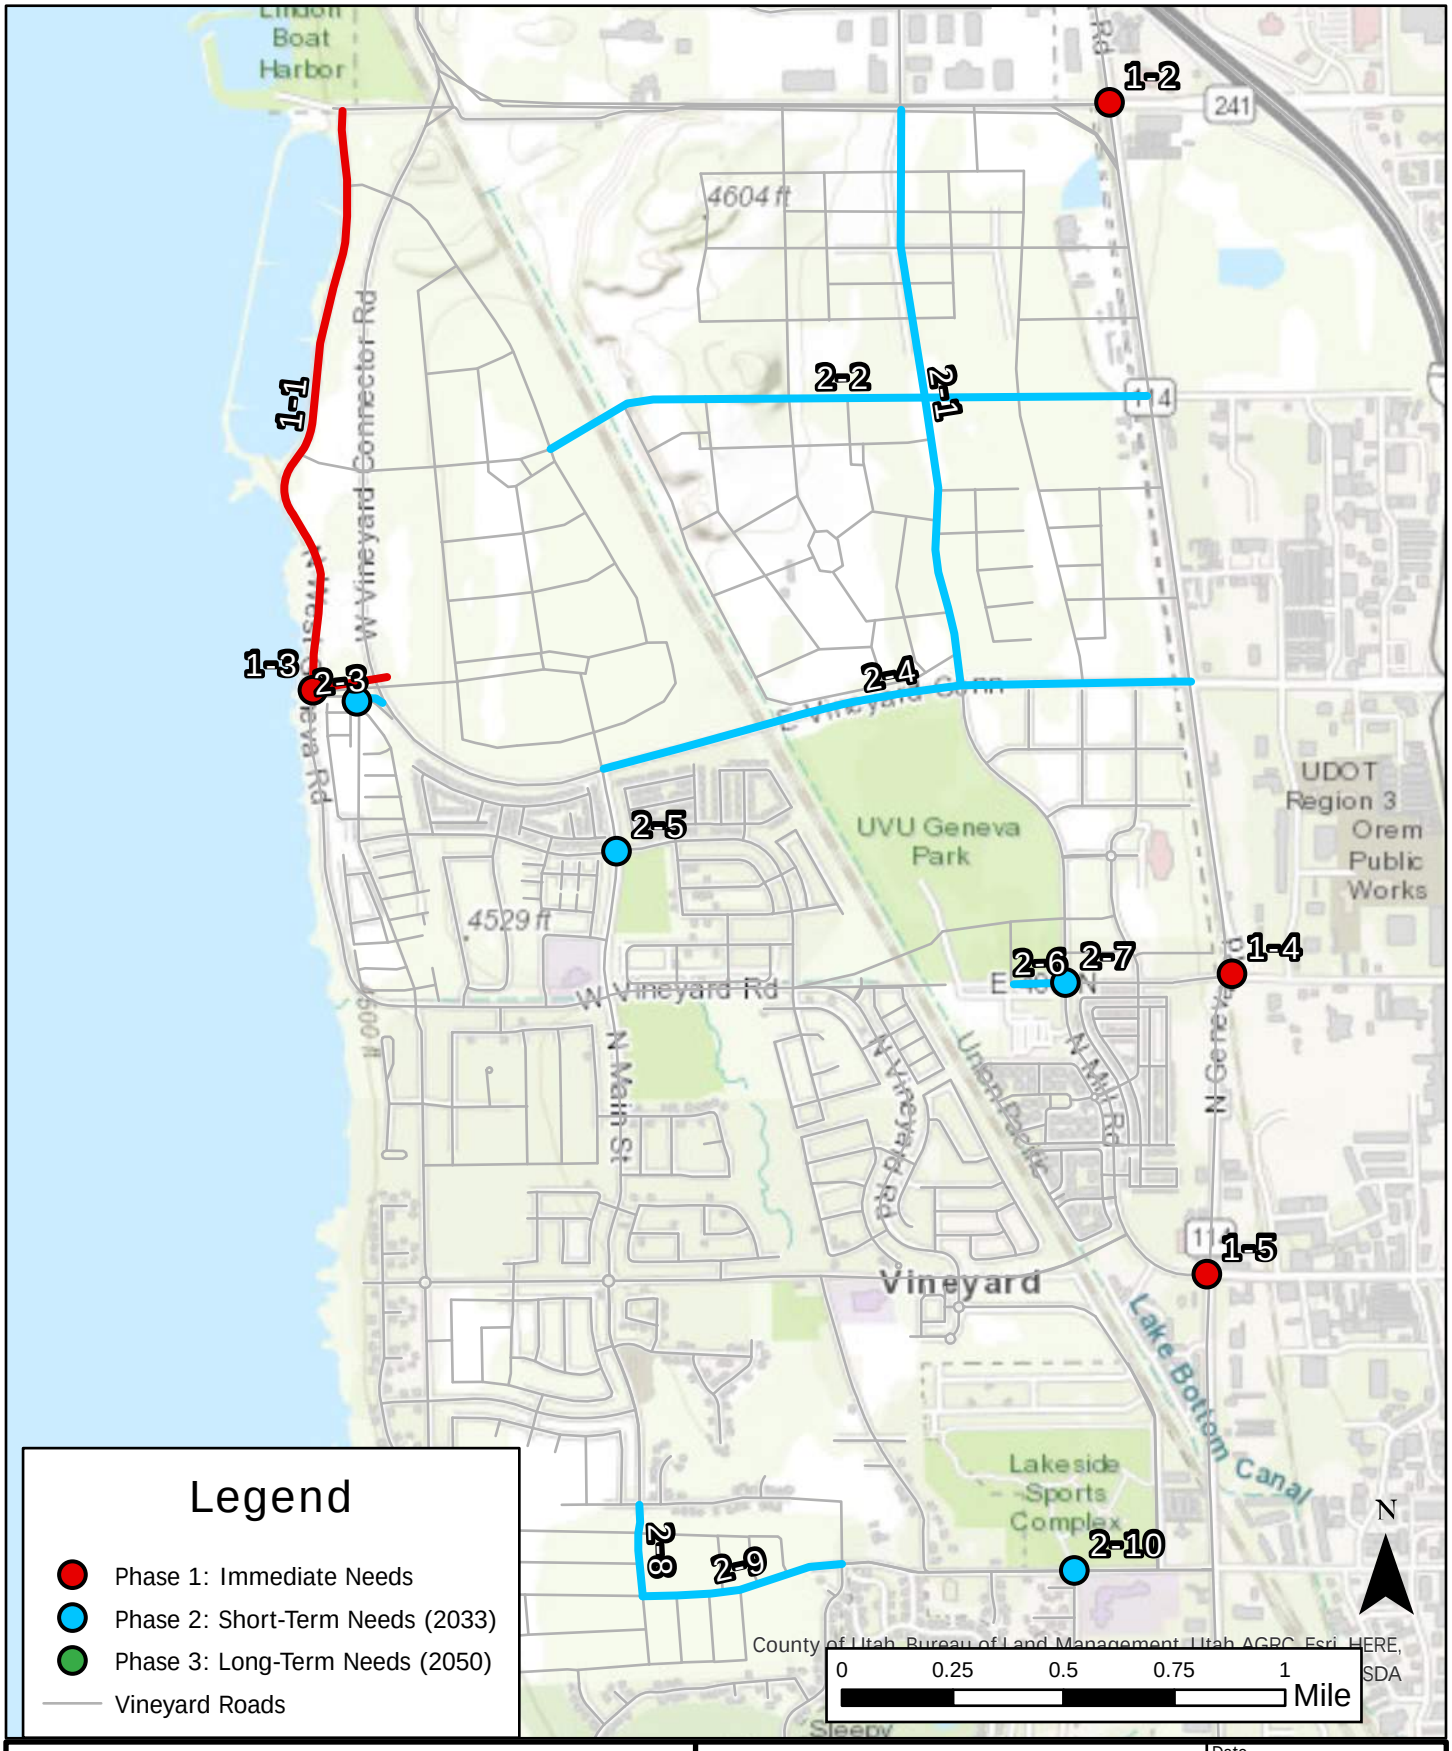

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2033) Projects

Date: 8/15/2025
Project: UT23-2453
Figure 15

Table 12: Future (2050) No-Build Evening Peak Hour Level of Service

Intersection		Level of Service		
Description	Control	Movement[1]	Aver. Delay (Sec/Veh)	LOS[2]
400 North / Main Street	Signal	-	36.8	D
600 North / Main Street	EB/WB Stop	NBL	38.0	e
Vineyard Road / Center Street	Signal	-	47.7	D
400 South / Geneva Road (SR-114)	Signal	-	41.9	D
Vineyard Road / 400 South	SB Stop	SBL	21.1	c

1. Movement indicated for unsignalized intersections where delay and LOS represents worst movement. SBL = Southbound left movement, etc.
2. Uppercase LOS used for signalized, roundabout, and AWSC intersections. Lowercase LOS used for non-AWSC unsignalized intersections.

Source: Hales Engineering, February 2025

Roadway Improvements

As Vineyard continues to develop, new roads will be constructed to connect developments to arterial streets. Additionally, improvements for future conditions were recommended for roadways that are anticipated to operate at a poor LOS. New roads and recommended improvements to city roadways are listed in Table 13. The recommended phase 3 roadway and intersections projects are shown in Figure 18. A map of the build-condition future (2050) roadway network and intersection control is shown in Figure 19.

Vineyard Connector Realignment

Based on preliminary traffic models, it was determined that the existing Vineyard Connector (800 North) alignment will be over-capacity at full buildout in the City. Therefore, a separate grade expressway/arterial is recommended as the new connection of the future Vineyard Connector Expressway to Geneva Road. This separate grade connection will divert pass-through traffic away from the heart of Vineyard City and improve conditions on the existing Vineyard Connector (800 North) alignment. The connection between the future Vineyard Connector Expressway to Geneva Road may be aligned at or just south of 1600 North. This will also create a true parallel route to I-15 rather than the indirect route of the current 800 North alignment. A conceptual view of the proposed alignment can be identified in Figure 19.

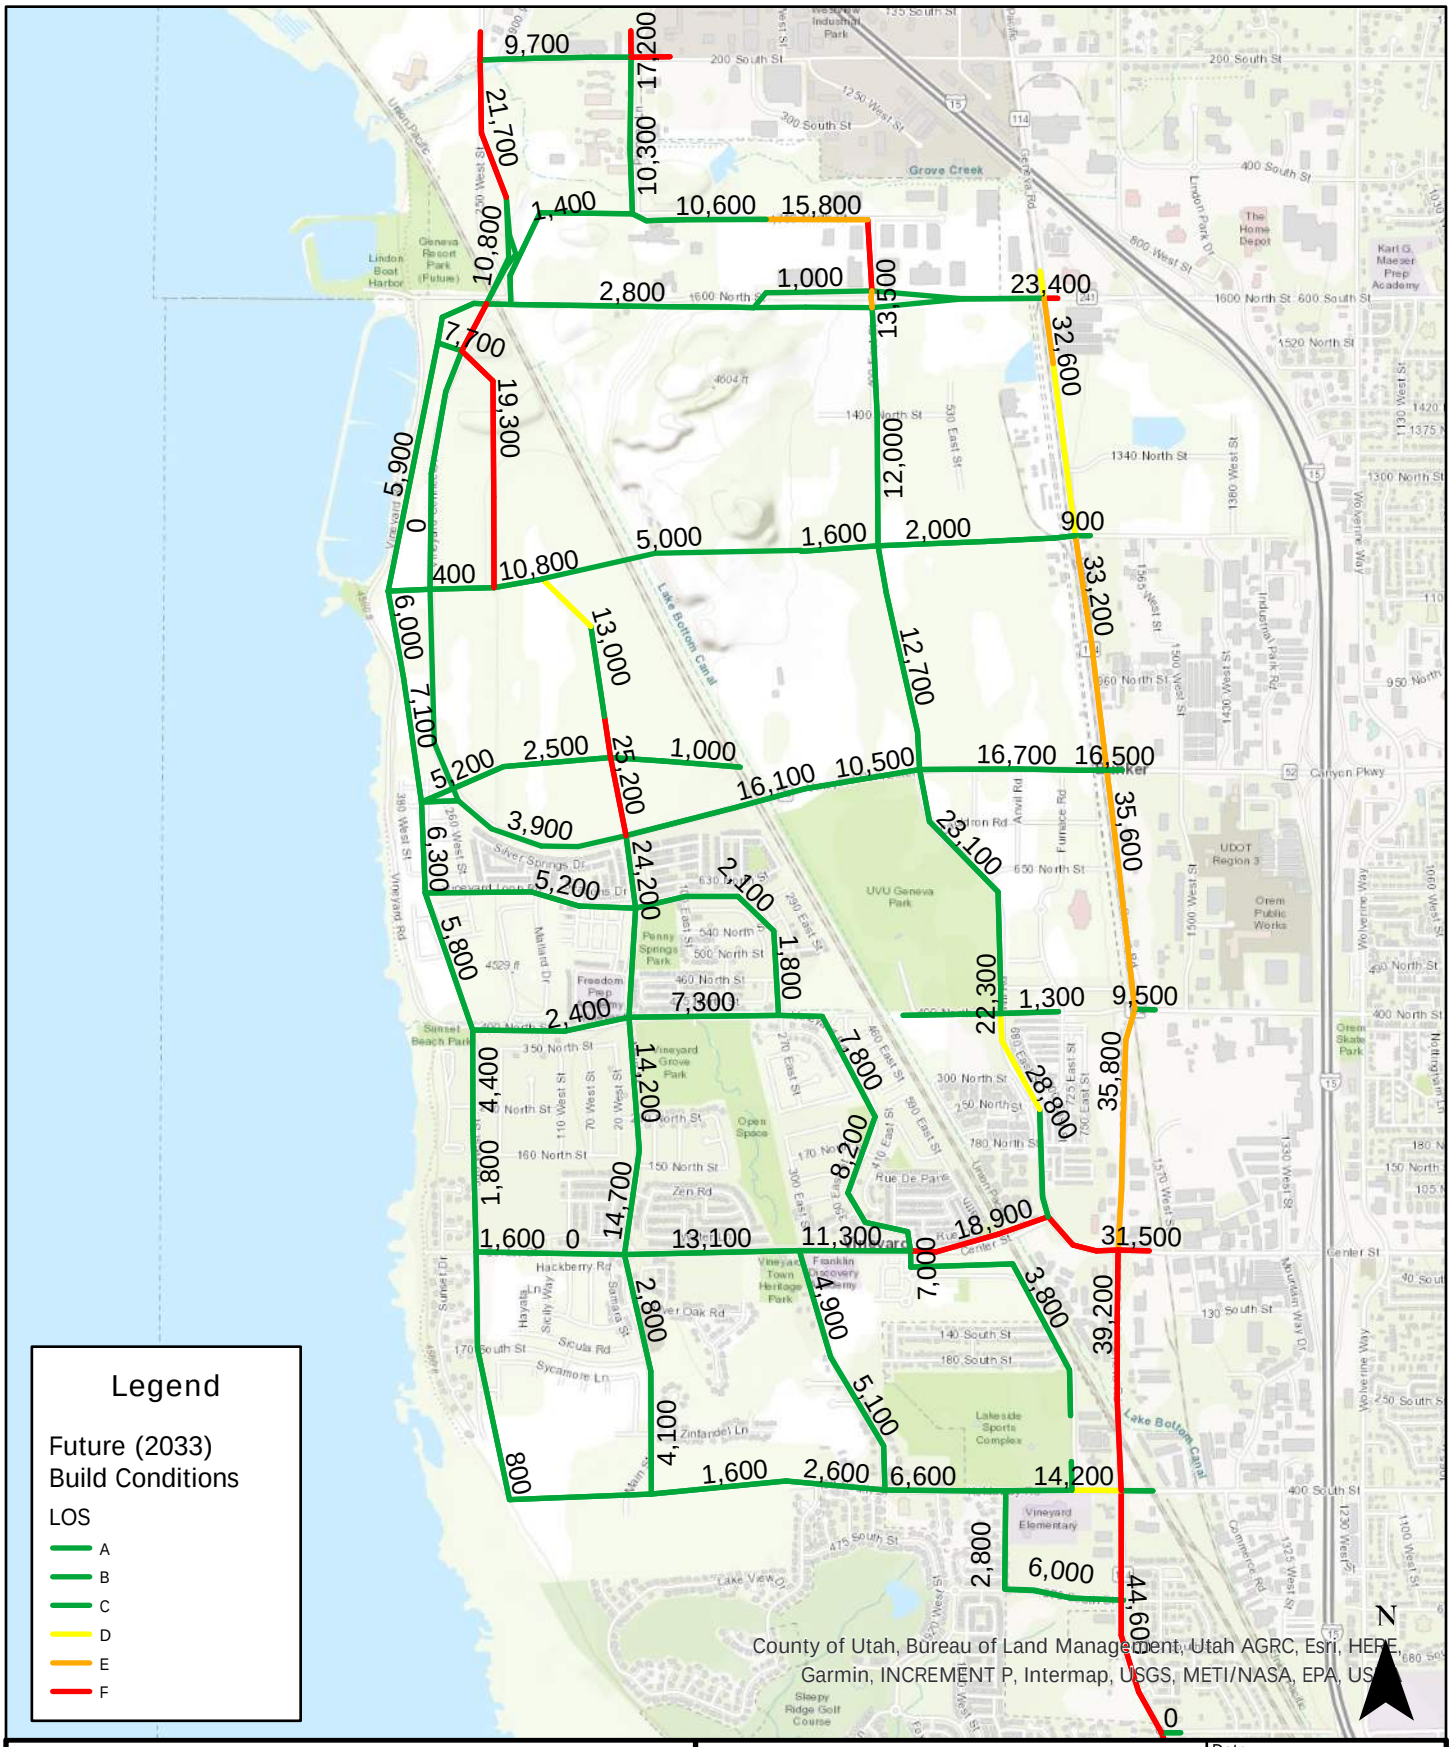

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2033) Build LOS

Date: 8/13/2025
Project: UT23-2453
Figure 16

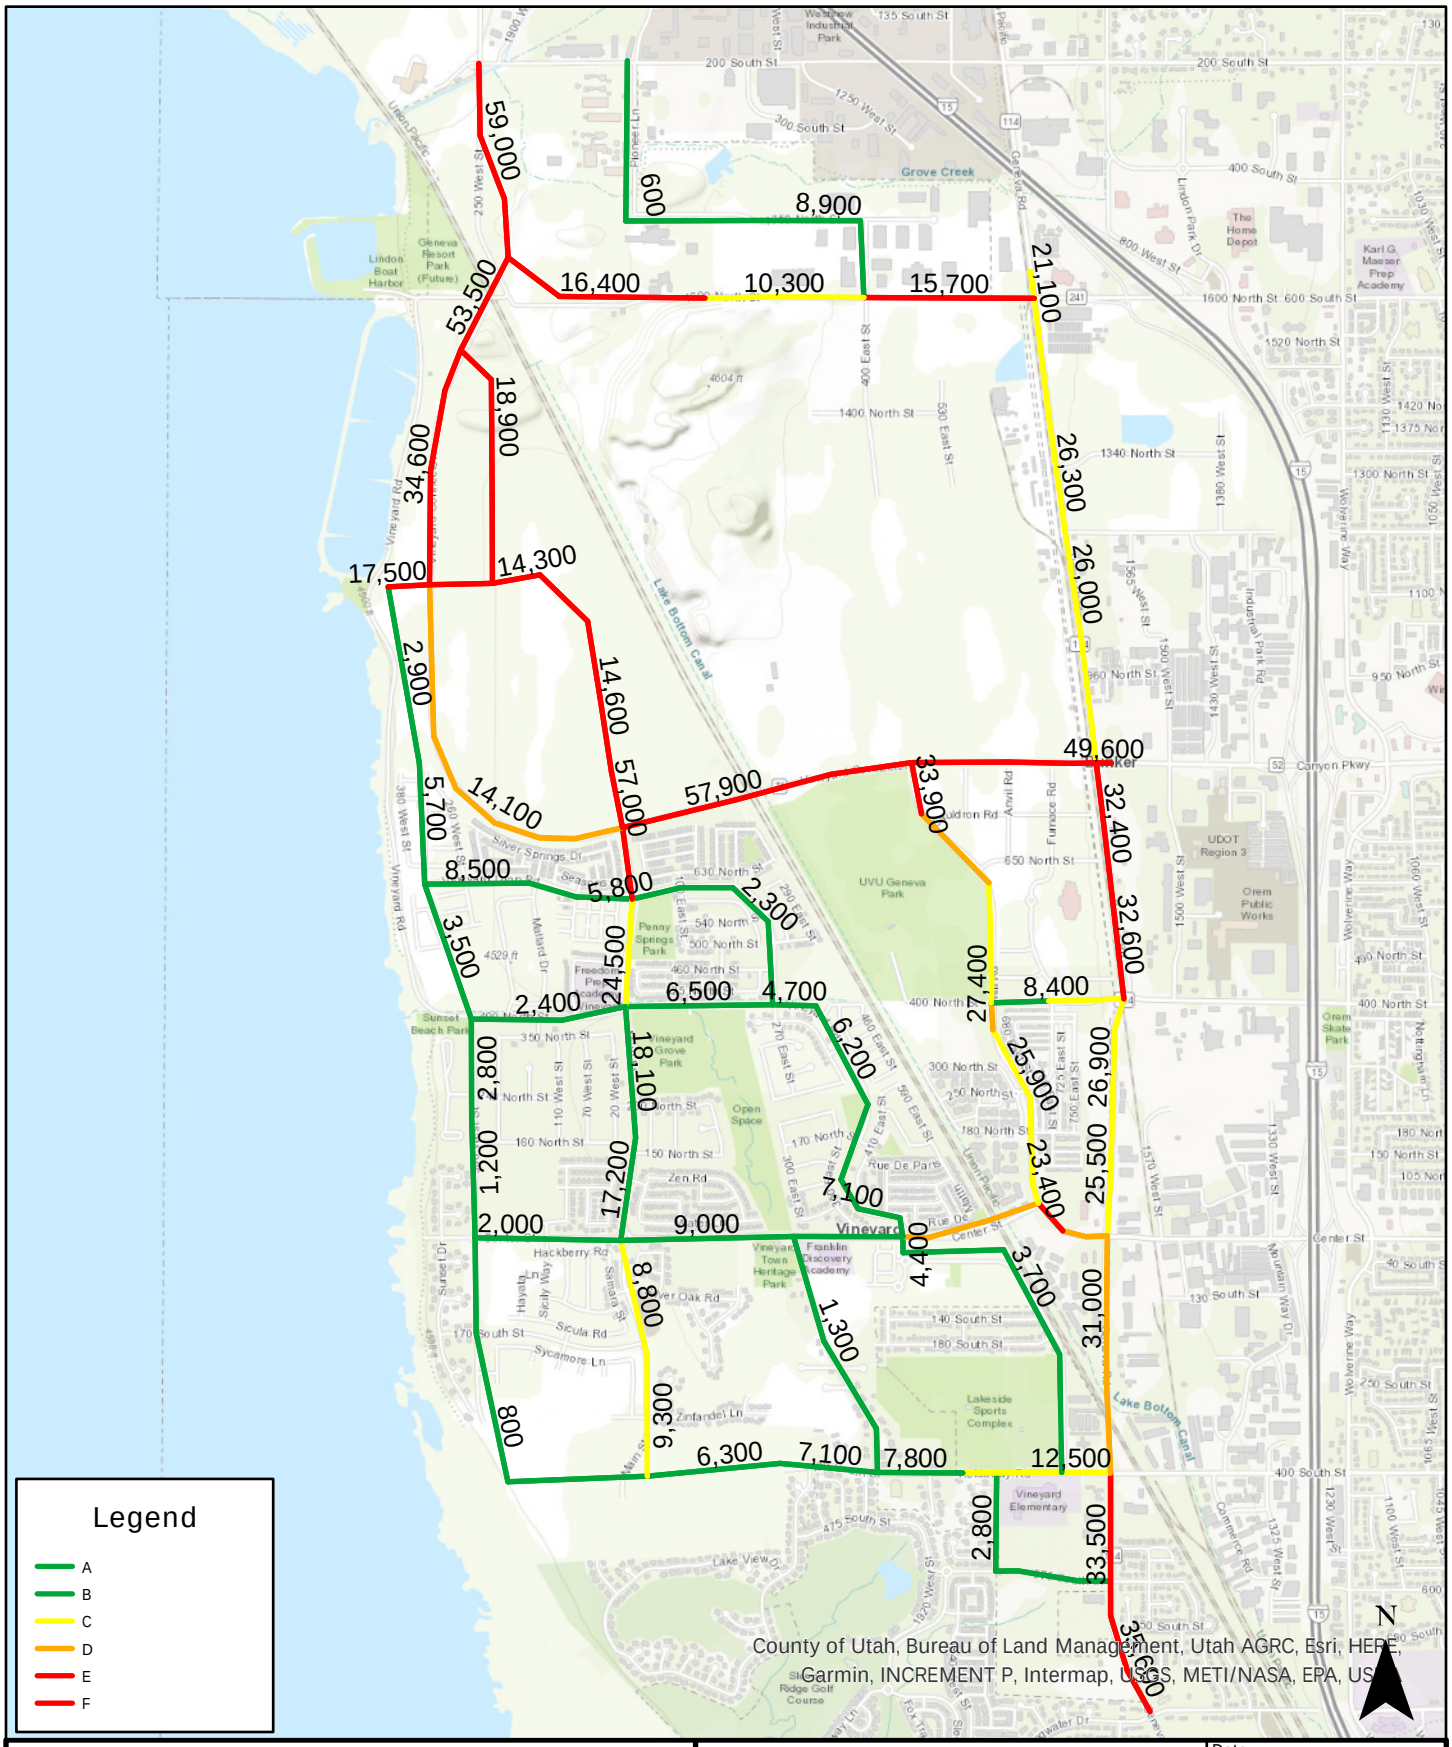

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) No-Build LOS

Date: 9/3/2025

Project: UT23-2453

Figure 17

Table 13: Recommended Phase 3 Improvement Projects

#	Location	Type	Description	Jurisdiction
1	New Vineyard Connector	New	New expressway along north and east sides of City	UDOT
2	1600 North: West of Railroad Crossing	Widen	Widen to 3 lanes	Vineyard
3	Vineyard Connector: 1200 North to 1600 North	Widen	Widen to 7 lanes	UDOT
4	Vineyard Connector: Main St to 1200 North	Widen	Widen to 5 lanes	UDOT
5	Main St / Vineyard Connector Intersection	Intersection	Increase intersection capacity / Innovative intersection	UDOT
6	Vineyard Connector & 800 North / Geneva Rd	Intersection	Grade-separated intersection	UDOT
7	400 North: Main St to Mill Rd	New	Construct 400 North connection (at-grade or grade-separated)	Vineyard
8	400 North / Geneva Rd	Intersection	Increase intersection capacity	UDOT
9	Center Street / Geneva Rd	Intersection	Increase intersection capacity	UDOT
10	Vineyard Road / 400 South	Intersection	Signalize intersection or install roundabout	Vineyard

BUILD LOS

With the proposed improvements, most Vineyard City roadways are anticipated to operate at LOS D or better, as shown in Figure 20. Future (2050) evening peak hour LOS results are shown in Table 14.

Table 14: Future (2050) Build Evening Peak Hour Level of Service

Intersection		Level of Service		
Description	Control	Movement[1]	Aver. Delay (Sec/Veh)	LOS[2]
400 North / Main Street	Signal	-	39.2	D
600 North / Main Street	Signal	-	12.2	B
Vineyard Road / Center Street	Signal	-	43.6	D
400 South / Geneva Road (SR-114)	Signal	-	37.7	D
Vineyard Road / 400 South	SB Stop	SBL	16.5	c

1. Movement indicated for unsignalized intersections where delay and LOS represents worst movement. SBL = Southbound left movement, etc.

2. Uppercase LOS used for signalized, roundabout, and AWSC intersections. Lowercase LOS used for non-AWSC unsignalized intersections.

Source: Hales Engineering, February 2025

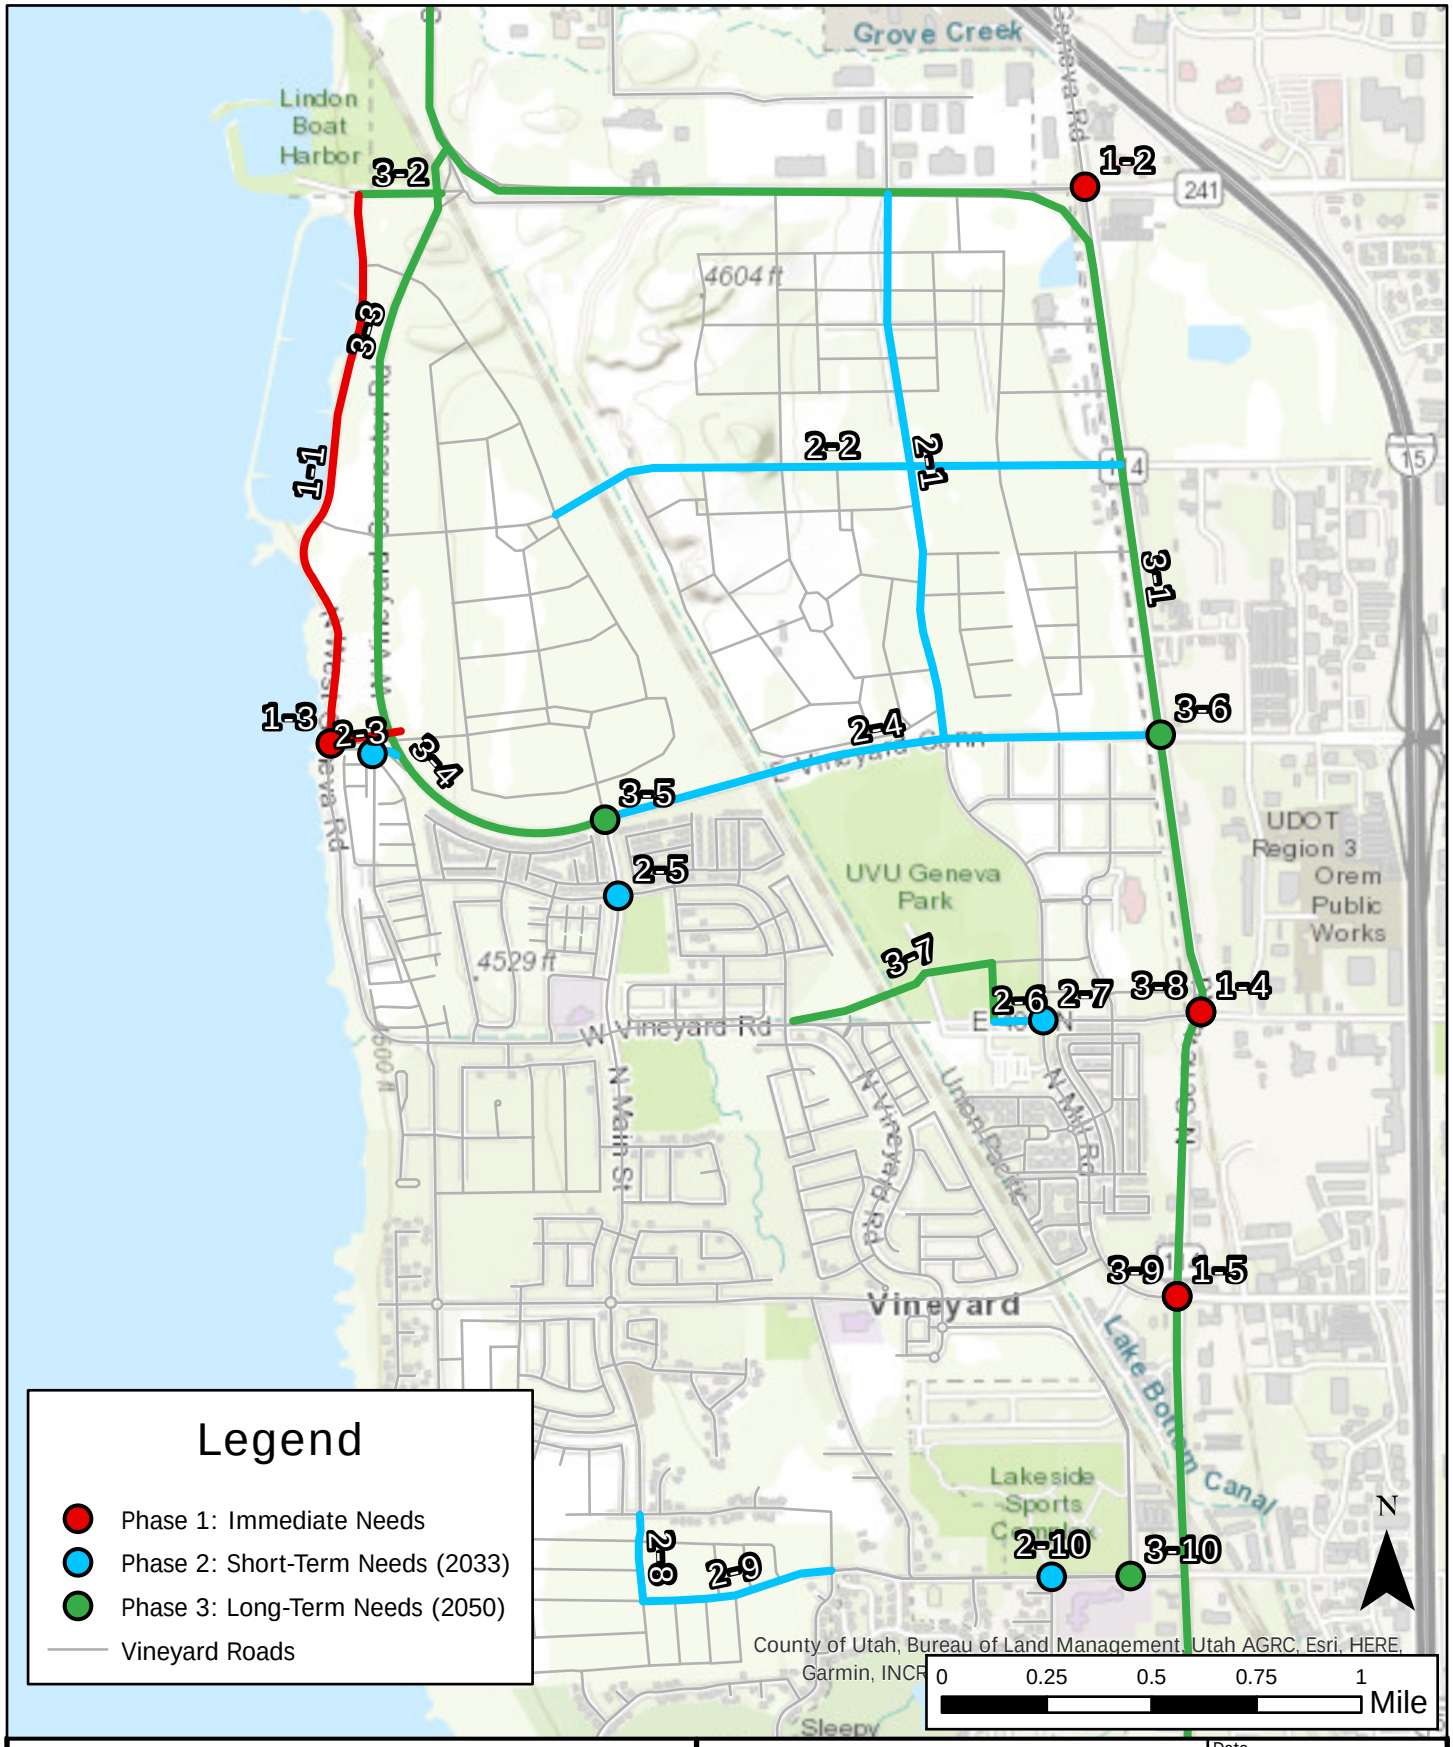

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) Roadway Projects

Date: 9/10/2025
Project: UT23-2453
Figure 18

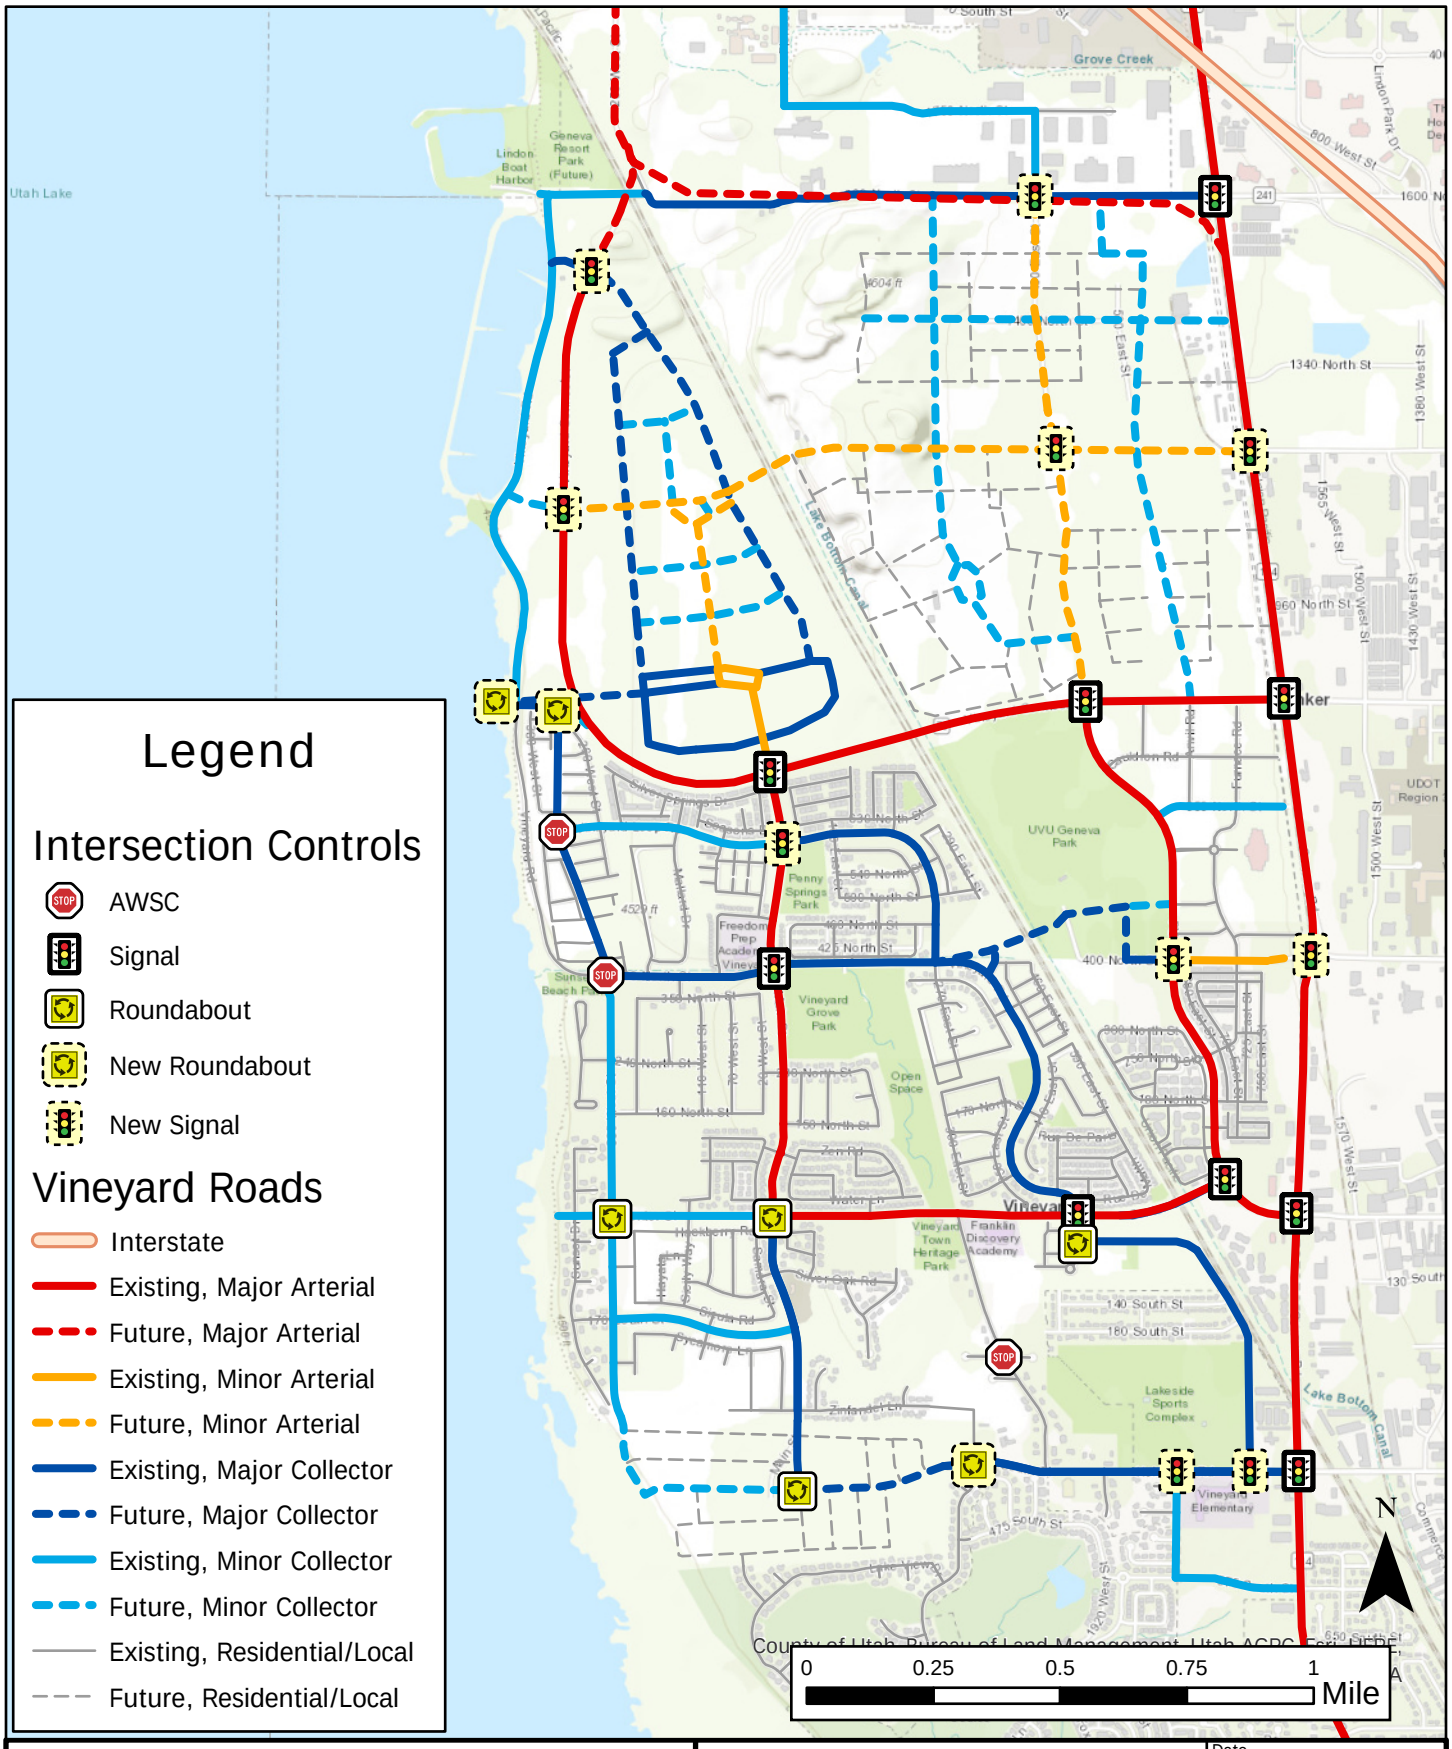

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) Roadway Network

Date: 10/7/2025
Project: UT23-2453
Figure 19

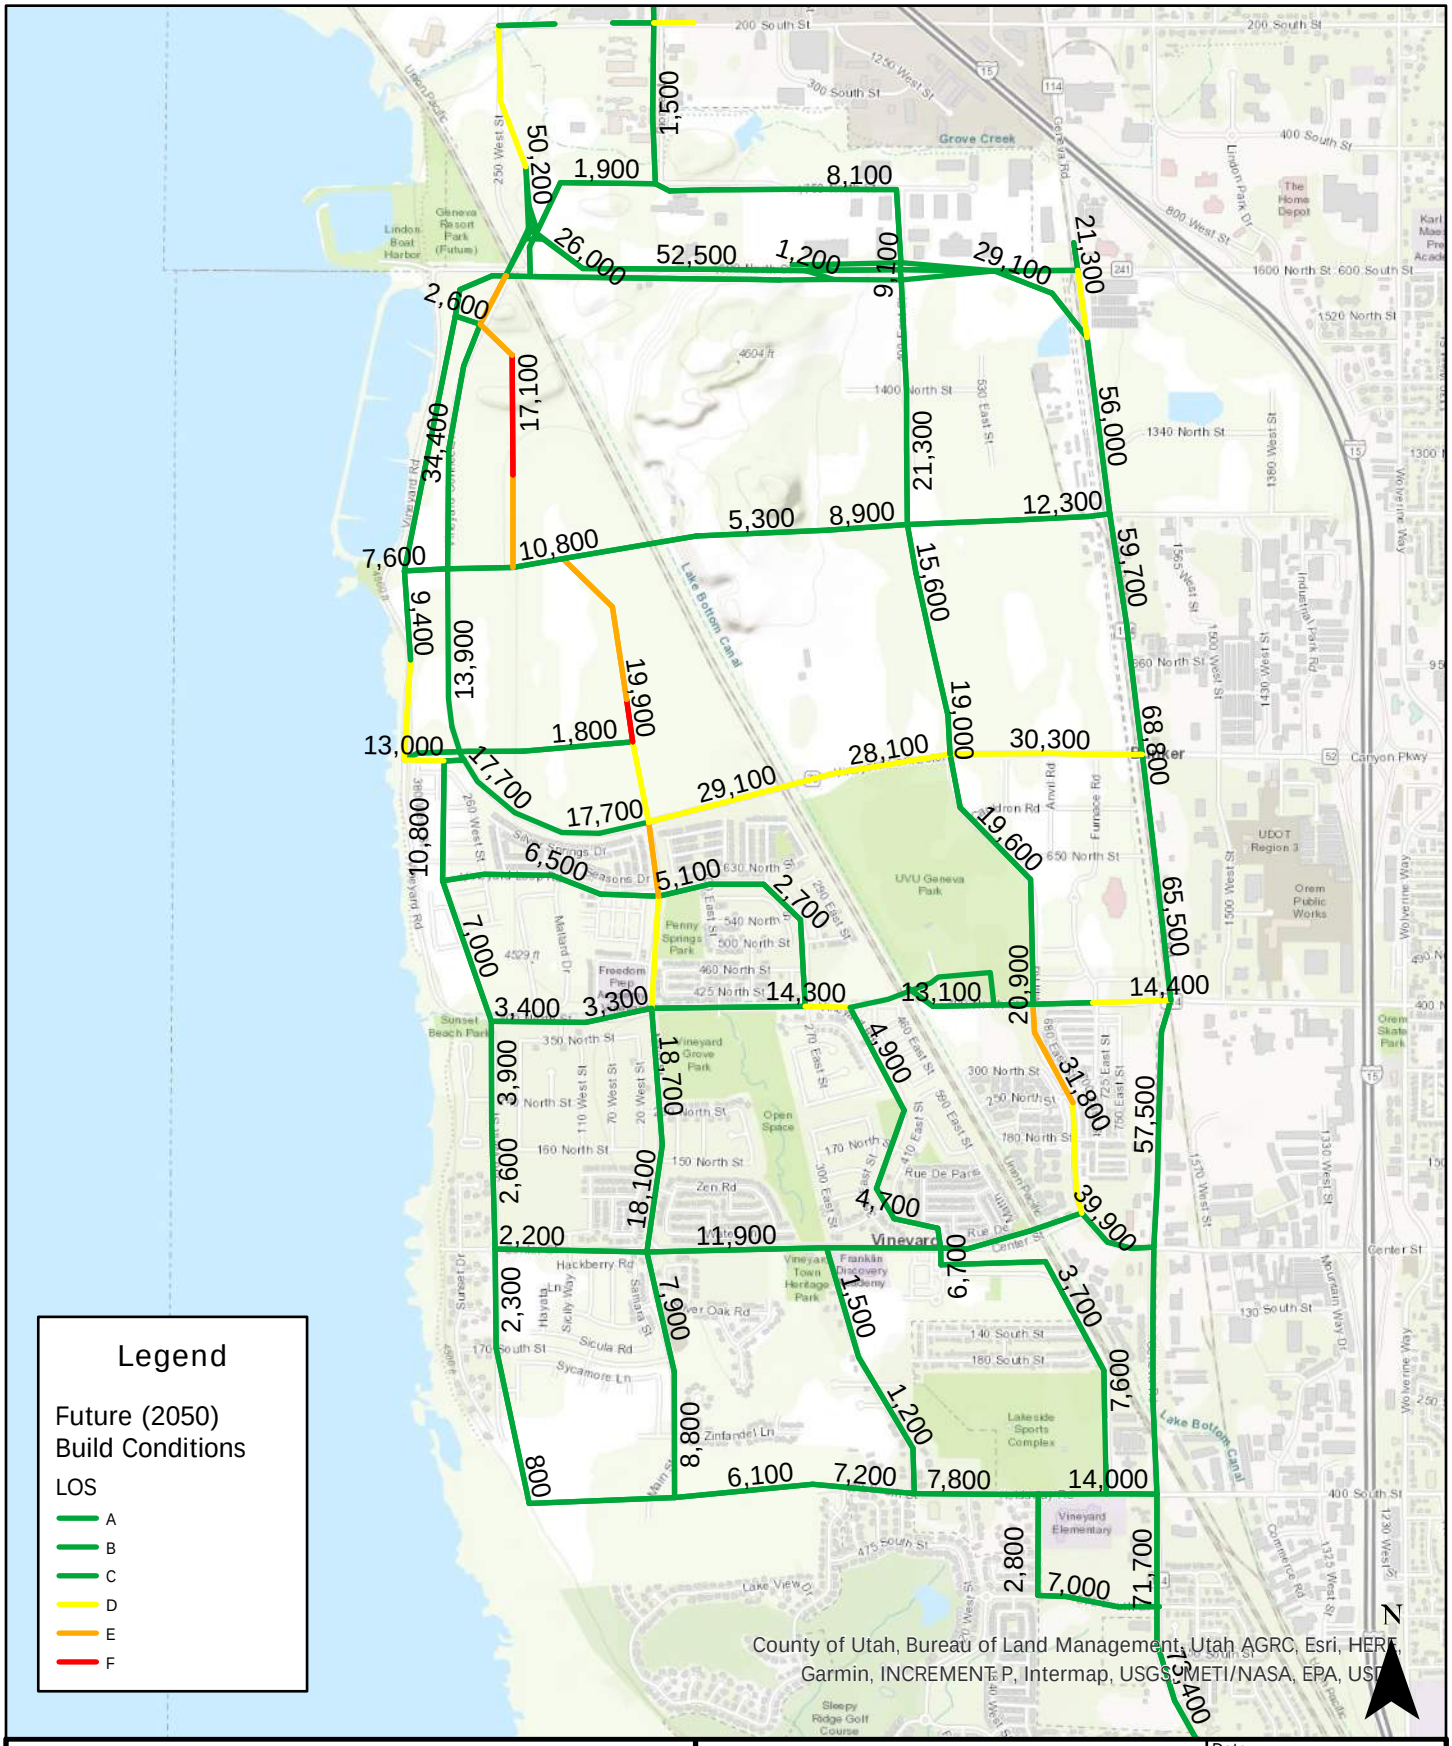

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) Build LOS

Date: 8/13/2025

Project: UT23-2453

Figure 20

PUBLIC TRANSIT & ACTIVE TRANSPORTATION

PURPOSE

A transportation system is composed of more than roadways. It also includes provisions for other modes of transportation including public transit, cycling, and walking. The purpose of this section is to discuss these modes and how Vineyard City can improve the infrastructure that facilitates these modes.

PUBLIC TRANSIT

Public transportation in Vineyard City is served by the Utah Transit Authority (UTA). Currently, public transportation within city limits includes bus and commuter rail service through UTA's Frontrunner system at the Vineyard Station. Figure 21 shows the existing and future transit routes in Vineyard.

The following are the existing transit facilities in Vineyard City:

- Bus – There is one existing UTA bus route that services Vineyard City, which is Route 834. Route 834 has headways of approximately 30 minutes and travels between Provo Central Station and the Vineyard Station via University Avenue, Orem Center Street, Vineyard Center Street, and Vineyard Main Street.
- UTA Frontrunner – The Vineyard Station, northeast of the Main Street & Vineyard Connector intersection provides UTA transit connectivity to the entire Wasatch Front from Provo to Ogden.

The following are proposed transit routes and systems for Vineyard:

- Light Rail (TRAX) – Proposed to follow along Geneva Road, then along 1200 North to the current rail line, then southward along the east side of the rail line towards Orem. This is anticipated to provide access to the greater Utah County transit network and to key destinations such as UVU. The first phase of this alignment could be a connection between the north UVU parcel in Vineyard to the main UVU campus in Orem.
- Bus Rapid Transit – One proposed connection between Orem / UVU to the Vineyard Station, and another proposed along 800 North to connect the Vineyard Station to transit routes along State Street (US-89) in Orem.
- Circulator – To reduce dependency on personal vehicles in the downtown area, a circulator could be considered to transport local downtown residents to various destinations, including the Vineyard Station. This will require further study as the downtown develops.

ACTIVE TRANSPORTATION

Providing safe and convenient bicycle and pedestrian facilities in Vineyard City is critical to promoting active and multi-modal transportation. If citizens have easy access to these facilities, use of the bicycle and pedestrian modes of travel will increase. The City has a few existing routes to facilitate these modes. However, there are also some improvements that could be made to improve the system.

This section is a supplement to the parks and recreation element of the General Plan. The following are the classifications of bike facilities that are found or planned for in Vineyard City:

- Multi-Use Trail – A separate path designed for non-motorized traffic such as bicycles or pedestrians. Other names for these facilities include "bike paths" or "shared-use paths."
- Bike Lane – A facility that includes striped lanes meant for bicycle use within the paved roadway.
- Shared Roadway – Facilities designated by signs, striping, and/or directional markers where bicycles share the roadway with motorized traffic.

Vineyard City currently has a growing network of these bicycle facilities. Future bike facilities were identified based primarily on the City of Vineyard Active Transportation Plan (November 2022). Existing and proposed bike facilities are shown in Figure 22. The purpose of the proposed facilities is to connect existing facilities and to plan for facilities in developing areas.

The details of multiple active transportation implements can be found in the Active Transportation Plan document. Some proposed treatments throughout the City include the following:

1. Shared Roadway –A sharrow in the vehicle travel lane for shared use.
2. Conventional Bike Lane –a dedicated bike lane adjacent to vehicle traffic.
3. Buffered Bike Lane –a bike lane separated by a small buffer from vehicles.

The location of parks is important when considering bike and pedestrian facilities and this was considered when proposing future facilities. Several parks currently exist in Vineyard City, scattered in a variety of places. More information on these parks is available at https://www.vineyardutah.gov/government/parks.php

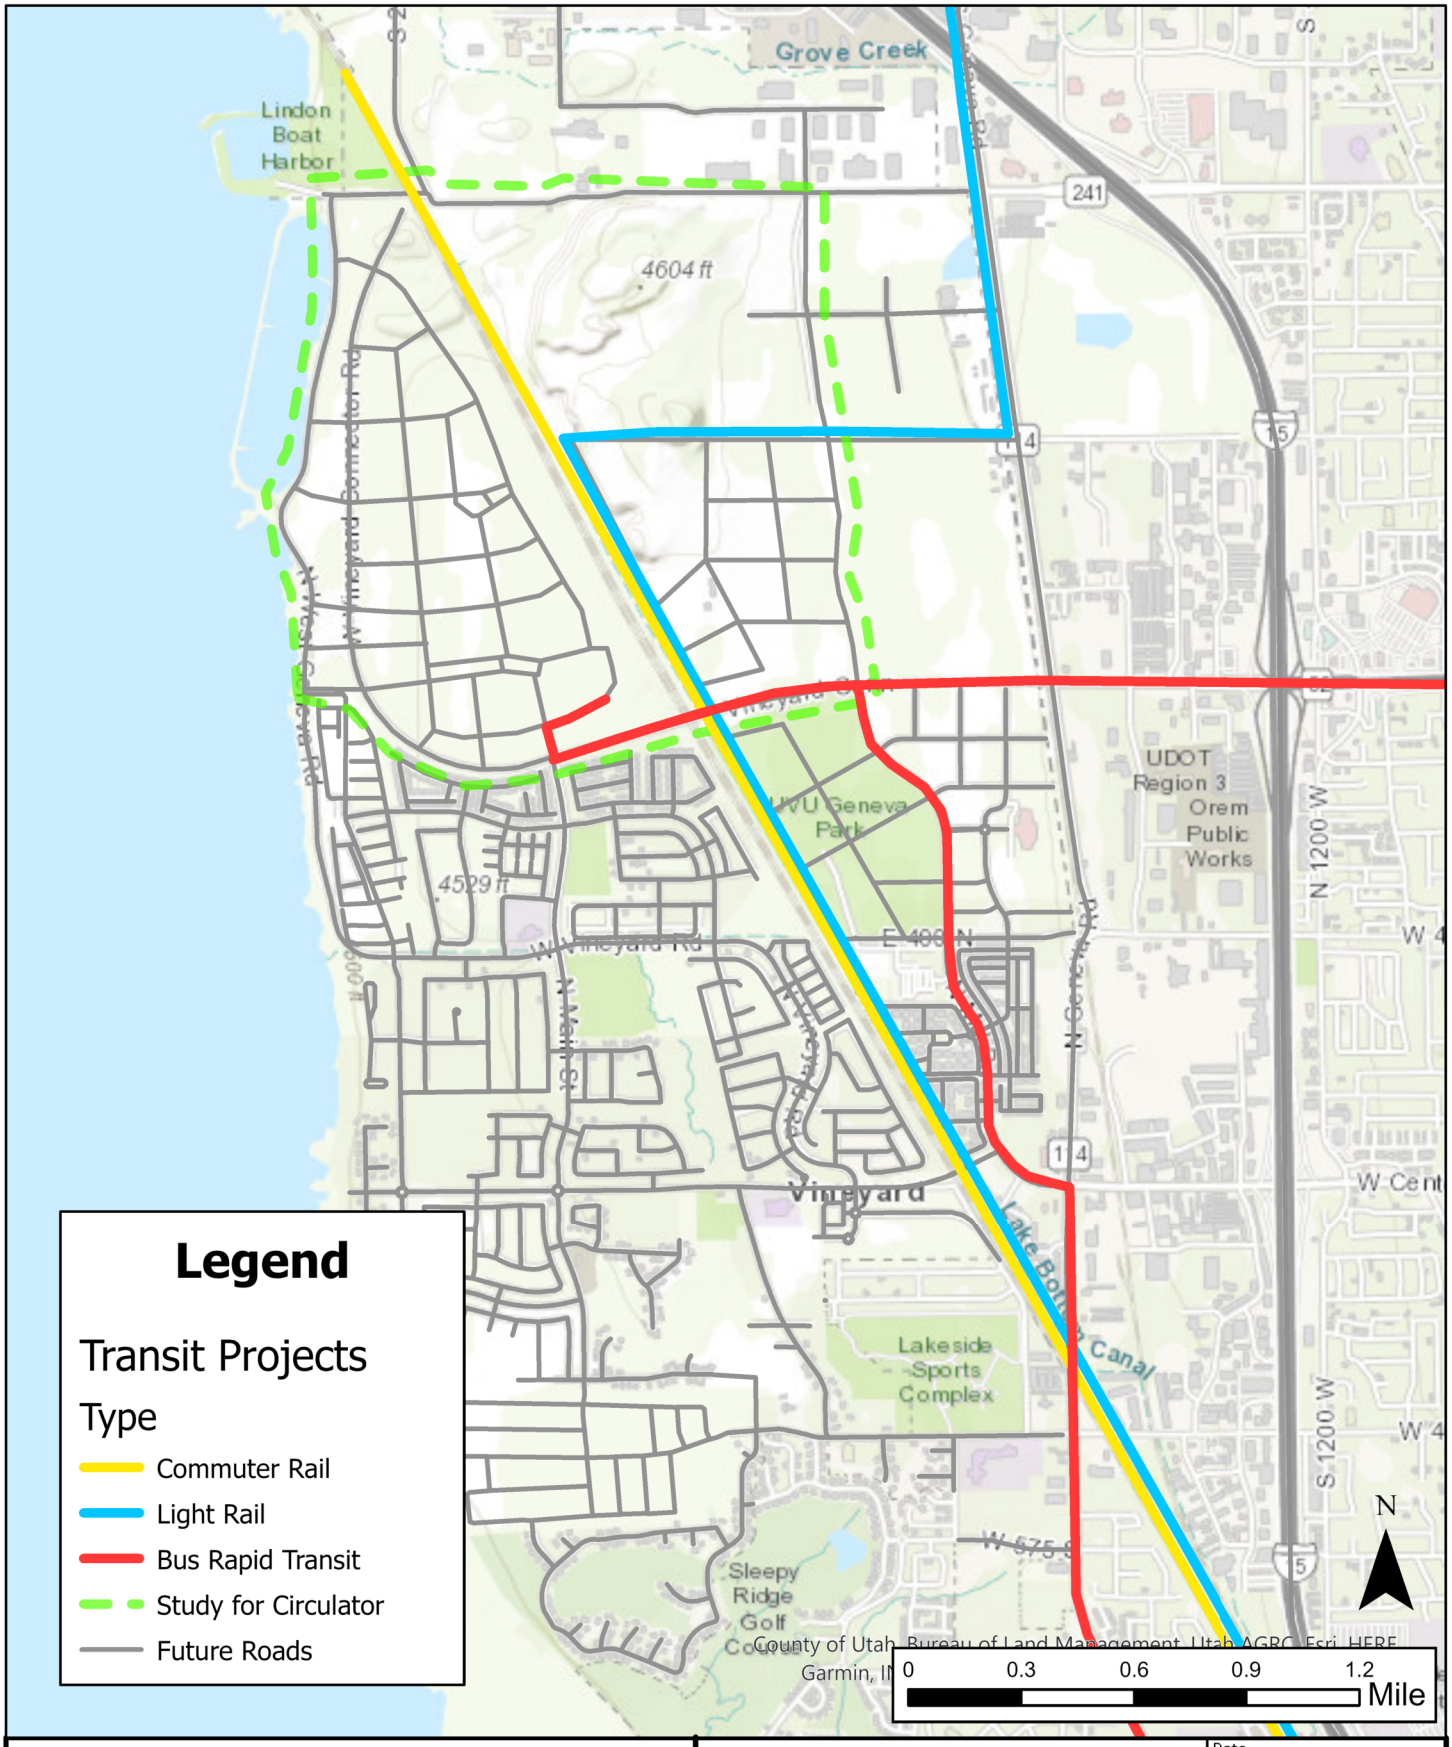

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) Transit

Date: 6/6/2025
Project: UT23-2453
Figure 21

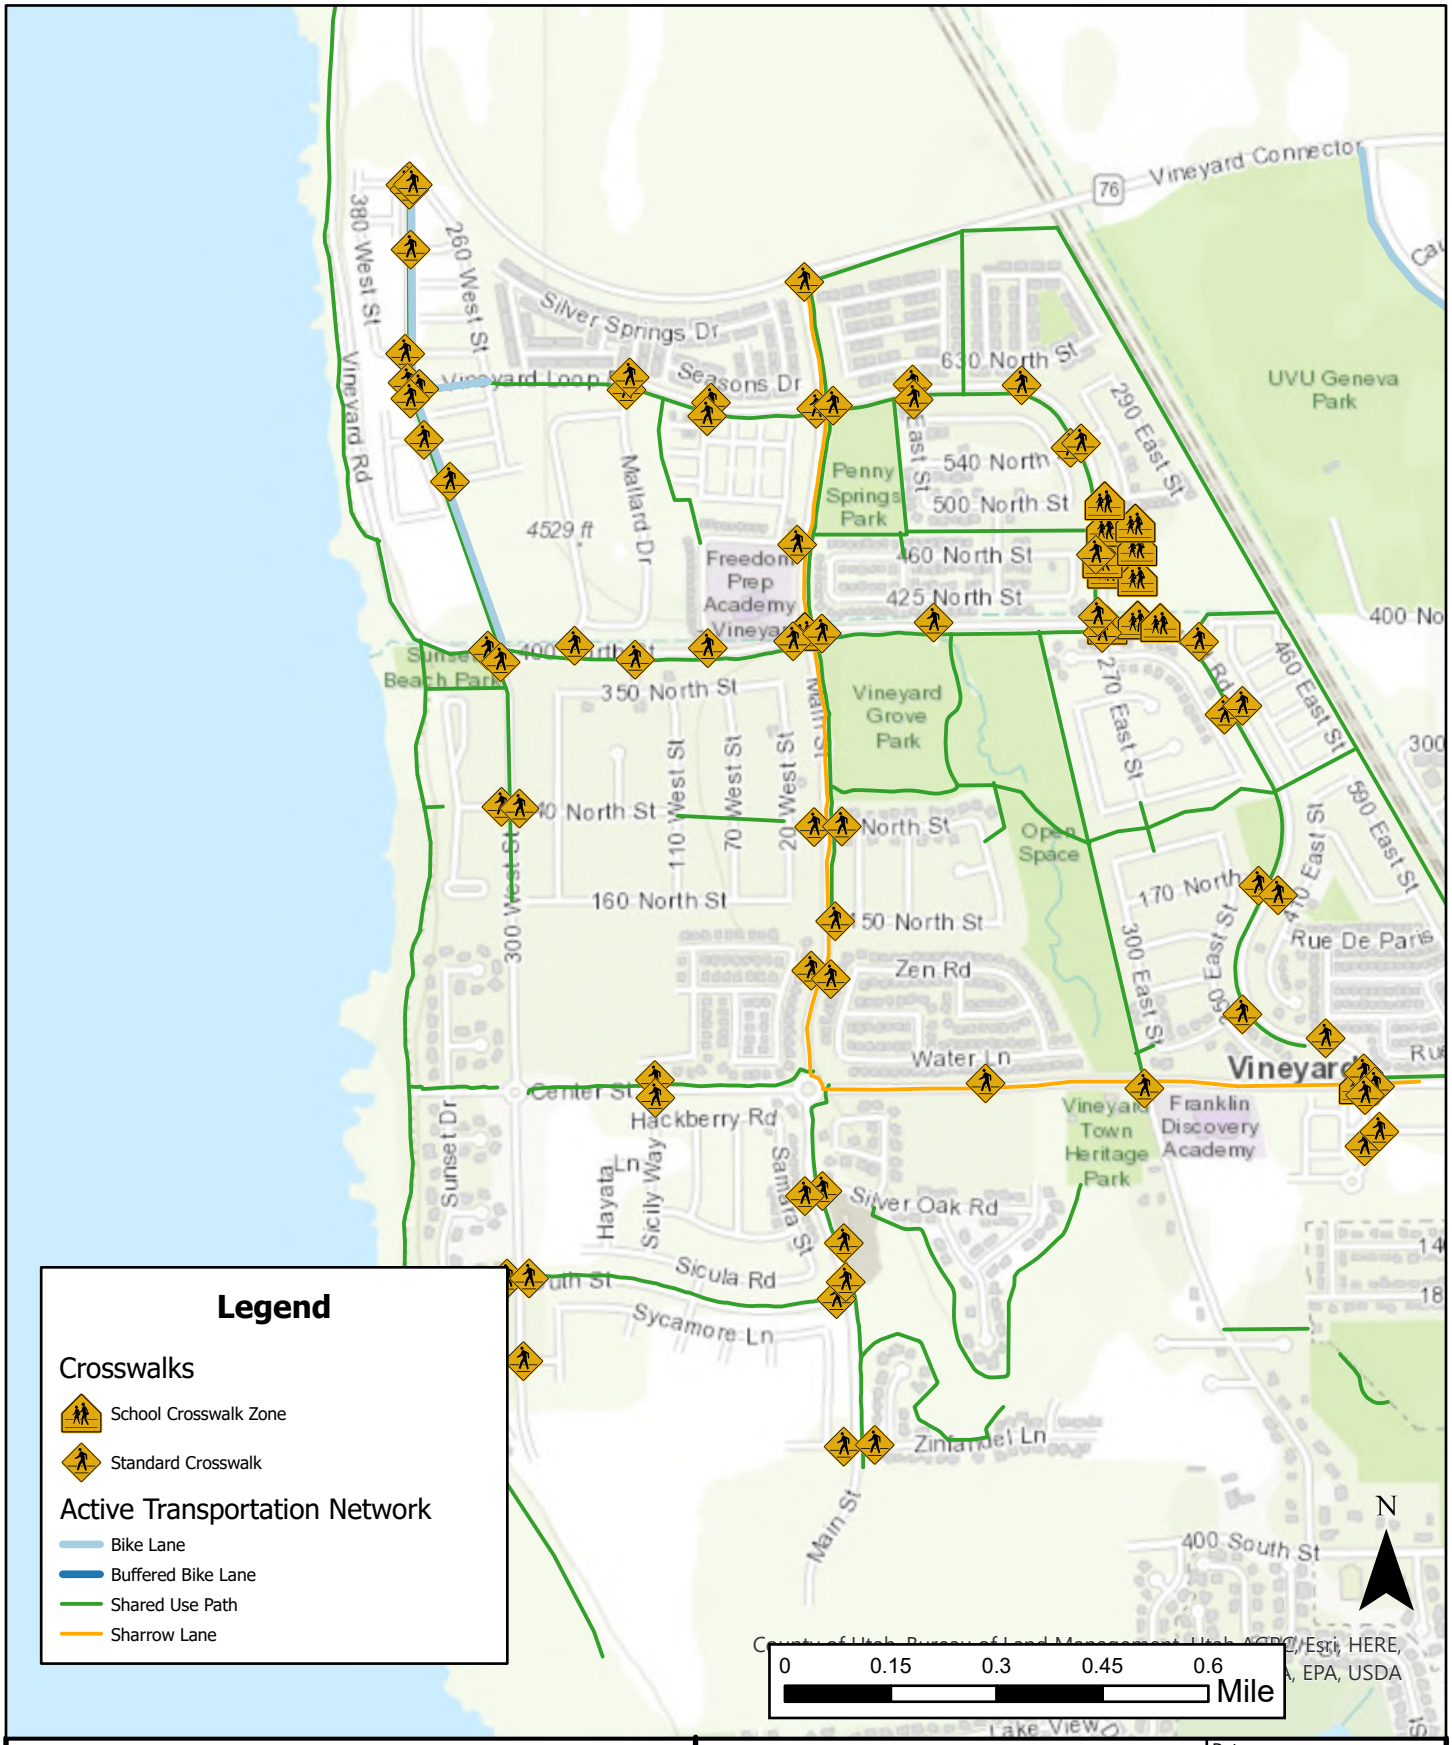

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Future (2050) Active Transportation

Date: 3/29/2025
Project: UT23-2453
Figure 22

SAFETY

PURPOSE

The purpose of this chapter is to analyze the safety of the existing road network in Vineyard City and to recommend improvements. A few intersections have been identified by the City as areas of concern which will be discussed in this chapter. In addition, potential traffic calming measures and access management strategies are presented.

SAFETY HOTSPOTS

This section addresses safety concerns at existing intersections in Vineyard City. Factors including crash history, sight distance, and intersection offset were examined to determine if any mitigations are needed to improve safety. Crash data are protected under 23 USC 409.

- 255 North / Mill Road
    - Angle collisions comprised approximately 15 percent of crashes at this location. 65 percent of crashes were intersection related. 30 percent of crashes involved roadway departures. Only one of the six reported crashes suspected minor injury. The remaining crashes were no injury/property damage only.
- 650 North / Mill Road
    - Both angle and sideswipe same direction collisions comprised approximately 25 percent of crashes at this location. All the crashes were intersection related. 40 percent of crashes involved roadway departures. Two of the eight reported crashes included possible injury. The remaining crashes were no injury/property damage only.
- 800 North / Mill Road
    - Angle collisions comprised approximately 15 percent of crashes at this location. All crashes were intersection related. 20 percent of crashes involved distracted driving. Five of the 30 reported crashes suspected minor injury and four reported possible injury. The remaining crashes were no injury/property damage only.
- 170 North / Vineyard Road
    - Angle collisions comprised approximately 60 percent of crashes at this location. 100 percent of crashes were intersection related. 30 percent of crashes involved distracted driving. Three of the seven crashes reported suspected minor injury, one reported possible injury, and one reported suspected serious injury. The remaining crashes were no injury/property damage only.
- Center Street / Main Street
    - Front to rear collisions comprised approximately 30 percent of crashes at this location. 85 percent of crashes were intersection related. 20 percent of crashes involved distracted driving. 30 percent of crashes were reported as sideswipe same direction. One of the six reported crashes was reported to be serious. The remaining crashes were no injury/property damage only.

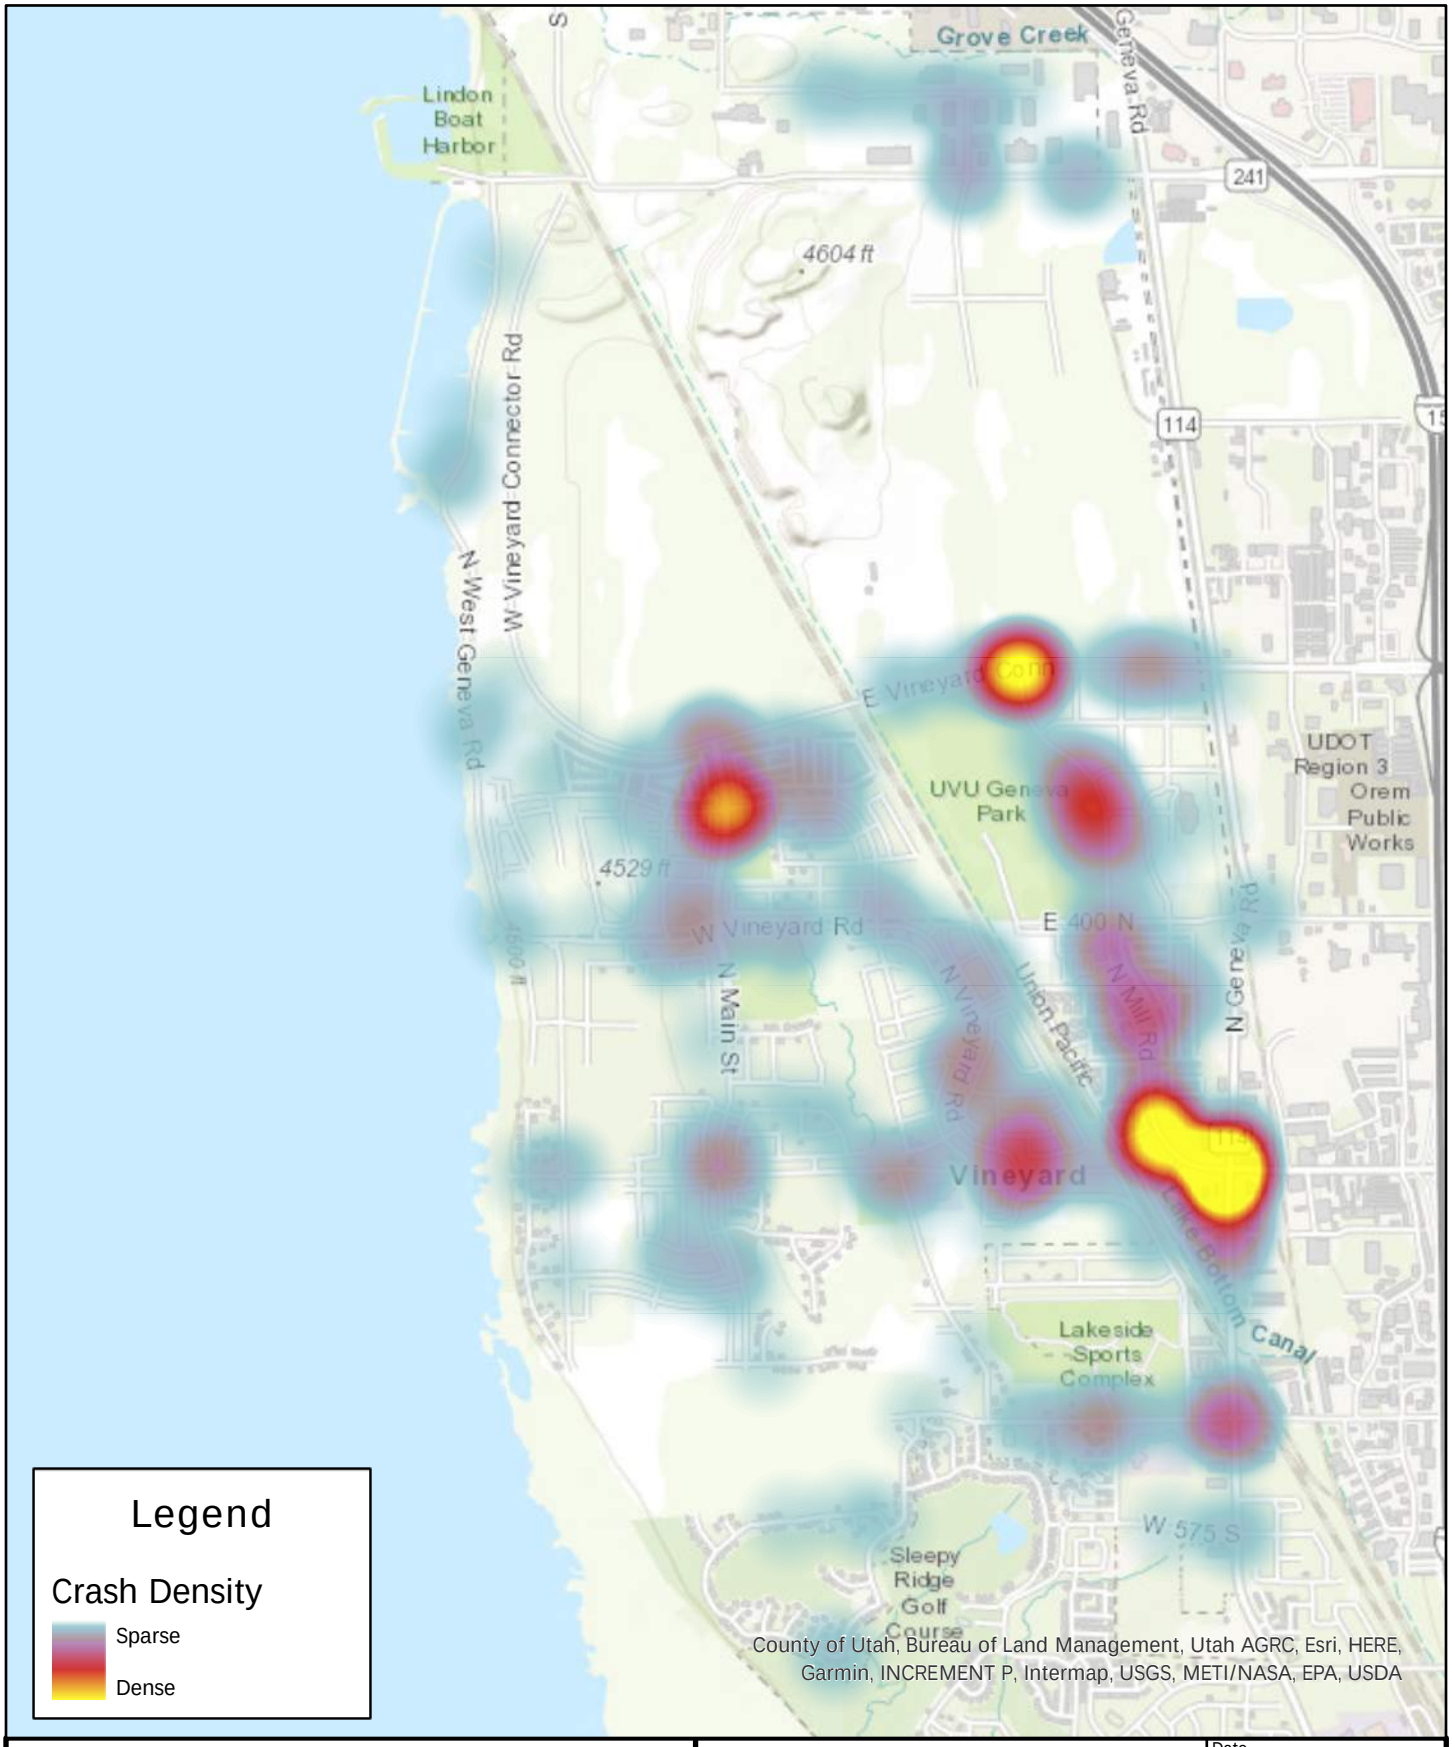

VINEYARD
STAY CONNECTED
TRANSPORTATION MASTER PLAN

Crash Analysis Heat Map

Date 6/13/2025

Project UT23-2453

Figure 23

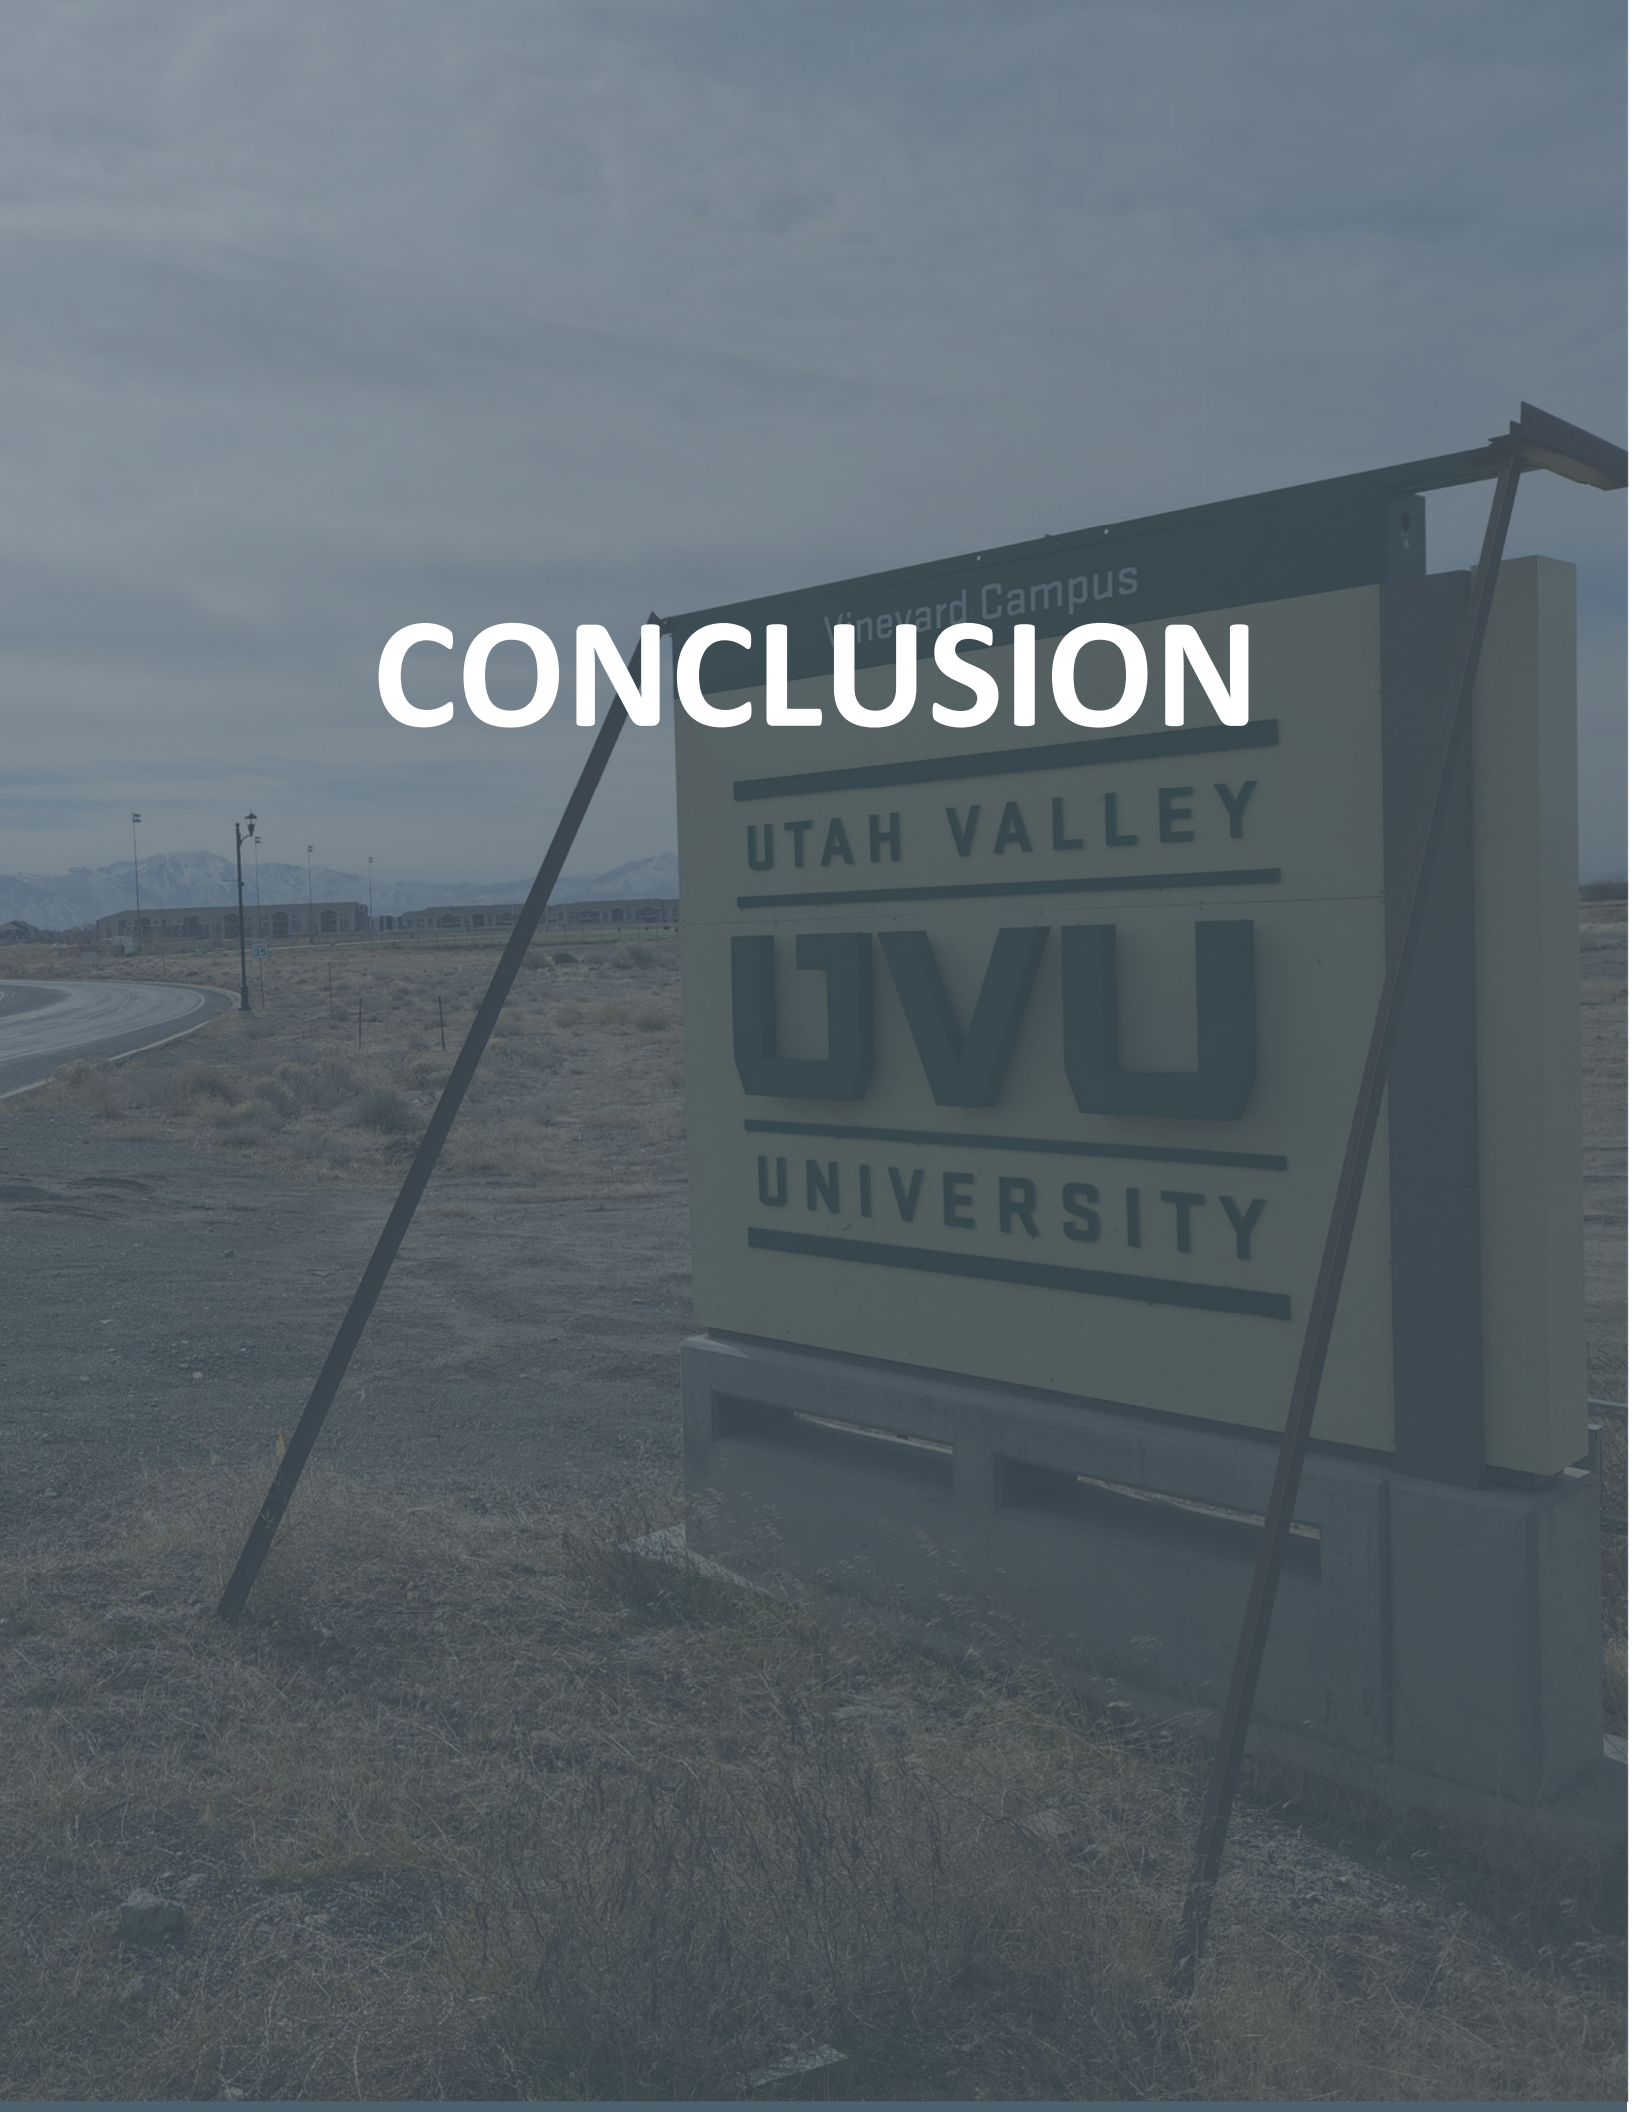

CONCLUSION

OVERVIEW

The purpose of this TMP for Vineyard City is to plan for the future multi-modal transportation needs of Vineyard City. The following tasks were completed as a part of this TMP:

- The land use and socioeconomic characteristics were reviewed and summarized.
- The functional classification of roadways was redefined.
- Data were collected to summarize the existing traffic volume conditions.
- Future volumes in 2050 conditions were projected using development predictions from Vineyard City and the travel demand model.
- A LOS analysis was performed to identify existing and future transportation needs.
- Improvements were recommended to support future growth.
- Locations for future signals were identified.
- Truck routes on existing and future roadways were identified.
- The public transit opportunities of the City were discussed.
- Recommendations were given regarding active transportation facilities.
- Several City transportation management strategies were outlined.

NEXT STEPS

It is recommended that the following steps be taken to implement the proposed improvements and recommendations of this study:

- Implement this TMP and pursue funding for roadway projects as needed.
- Require that the trip generation for all new developments be calculated to determine its impact on City roadways. With each new development that generates at least 100 peak hour trips, require that a traffic impact study be completed to analyze nearby intersections to determine needed improvements.
- Continue to communicate regularly with UDOT and UTA on current and future roadway and transit improvement needs within the City.
- Work with the State's Office of Outdoor Recreation, Bike Utah, and other agencies to apply for grant funding to increase the number of trails and active transportation/recreation options for Vineyard City residents. Install bicycle and pedestrian friendly facilities (bike racks, water stations, etc) at key locations for public access.
- Plan to address the safety hotspots with traffic calming devices as outlined above in the plan
- Work with UTA to extend public transportation options